



HWS600

EVALUATION DATA

型式データ

| DWG No. A232-53-01A | | |
|--|---|--------------|
| APPD | CHK | DWG |
|  |  | H. Ikeda |
| 21/Dec.'05 | 8. Dec. '05 | 08. Dec. '05 |

INDEX

| | PAGE |
|--|---------|
| 1. 測定方法 Evaluation Method | |
| 1.1 測定回路 Circuit used for determination | T-1~5 |
| (1) 静特性 Steady state data | |
| (2) 通電ドリフト特性 Warm up voltage drift characteristics | |
| (3) 過電流保護特性 Over current protection (OCP) characteristics | |
| (4) 過電圧保護特性 Over voltage protection (OVP) characteristics | |
| (5) 出力立ち上がり特性 Output rise characteristics | |
| (6) 出力立ち下がり特性 Output fall characteristics | |
| (7) ON/OFFコントロール時出力立ち上がり特性 Output rise characteristics with ON/OFF CONTROL | |
| (8) ON/OFFコントロール時出力立ち下がり特性 Output fall characteristics with ON/OFF CONTROL | |
| (9) 過渡応答 (入力急変) 特性 Dynamic line response characteristics | |
| (10) 過渡応答 (負荷急変) 特性 Dynamic load response characteristics | |
| (11) 入力サージ電流 (突入電流) 特性 Inrush current characteristics | |
| (12) リーク電流特性 Leakage current characteristics | |
| (13) 出力リップル、ノイズ波形 Output ripple and noise waveform | |
| (14) スタンバイ電流 Standby current | |
| (15) EMI 特性 Electro-Magnetic Interference characteristics | |
| 1.2 使用測定機器 List of equipment used | T-6 |
| 2. 特性データ Characteristics | |
| 2.1 静特性 Steady state data | |
| (1) 入力・負荷・温度変動 Regulation - line and load, Temperature drift | T-7 |
| (2) 出力電圧・リップルノイズ電圧対入力電圧 Output voltage and Ripple noise voltage vs. Input voltage | T-8 |
| (3) 効率・入力電流対出力電流 Efficiency and Input current vs. Output current | T-9 |
| (4) 力率・入力電流対出力電流 Power factor and Input current vs. Output current | T-10 |
| 2.2 通電ドリフト特性 Warm up voltage drift characteristics | T-11 |
| 2.3 過電流保護特性 Over current protection (OCP) characteristics | T-12~13 |
| 2.4 過電圧保護特性 Over voltage protection (OVP) characteristics | T-14 |
| 2.5 出力立ち上がり特性 Output rise characteristics | T-15~16 |
| 2.6 出力立ち下がり特性 Output fall characteristics | T-17~18 |

| | | |
|------|---|---|
| 2.7 | ON/OFFコントロール時出力立ち上がり特性 | |
| | Output rise characteristics with ON/OFF CONTROL | T-19 |
| 2.8 | ON/OFFコントロール時出力立ち下がり特性 | |
| | Output fall characteristics with ON/OFF CONTROL | T-20 |
| 2.9 | 出力保持時間特性 | Hold up time characteristics T-21 |
| 2.10 | 過渡応答（入力急変）特性 | Dynamic line response characteristics T-22 |
| 2.11 | 過渡応答（負荷急変）特性 | Dynamic load response characteristics T-23~25 |
| 2.12 | 入力電圧瞬停特性 | Response to brownout characteristics T-26~27 |
| 2.13 | 入力サージ電流（突入電流）特性 | Inrush current waveform T-28~29 |
| 2.14 | 瞬停時突入電流特性 | Inrush current characteristics T-30 |
| 2.15 | 入力電流波形 | Input current waveform T-31 |
| 2.16 | 高調波成分 | Input current harmonics T-32 |
| 2.17 | リーク電流特性 | Leakage current characteristics T-33 |
| 2.18 | 出力リップル、ノイズ波形 | Output ripple and noise waveform T-34~35 |
| 2.19 | スタンバイ電流 | Standby current T-36 |
| 2.20 | E M I 特性 | Electro-Magnetic Interference characteristics T-37~42 |


使用記号 Terminology used

| | Definition | |
|-----------|-----------------|---------------------|
| V_{in} | 入力電圧 | Input voltage |
| V_{out} | 出力電圧 | Output voltage |
| I_{in} | 入力電流 | Input current |
| I_{out} | 出力電流 | Output current |
| T_a | 周囲温度 | Ambient temperature |
| f | 周波数 | Frequency |
| FG | フレームグラウンド | Frame GND |

1. 測定方法 Evaluation Method


1.1 測定回路 Circuit used for determination

(1) 静特性 Steady state data

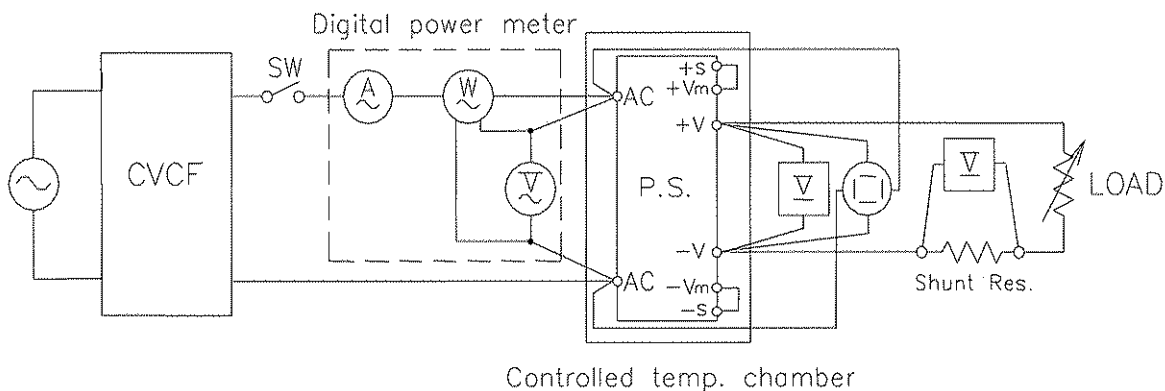

(2) 通電ドリフト特性 Warm up voltage drift characteristics Same as Steady state data

(3) 過電流保護特性 Over current protection (OCP) characteristics

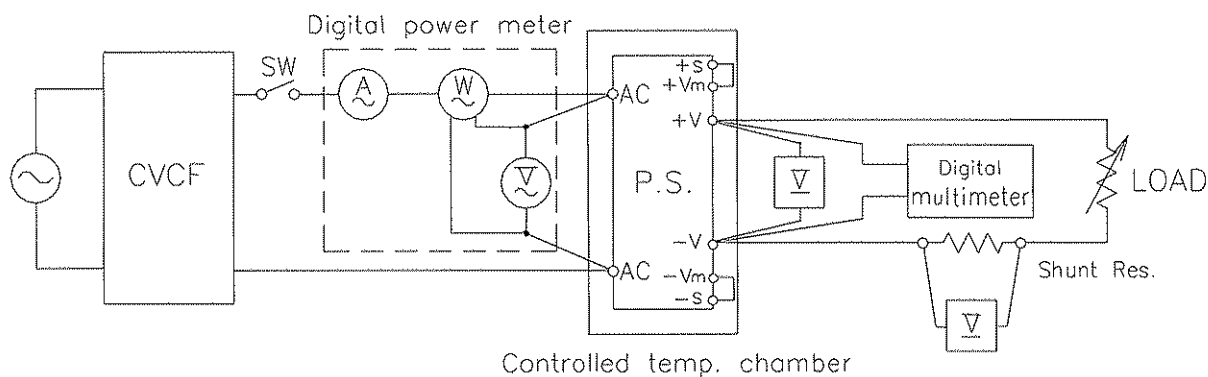


(4) 過電圧保護特性 Over voltage protection (OVP) characteristics Same as Steady state data

(5) 出力立ち上がり特性 Output rise characteristics Same as Steady state data

(6) 出力立ち下がり特性 Output fall characteristics Same as Steady state data




- (7) ON/OFFコントロール時出力立ち上がり特性
Output rise characteristics with ON/OFF CONTROL

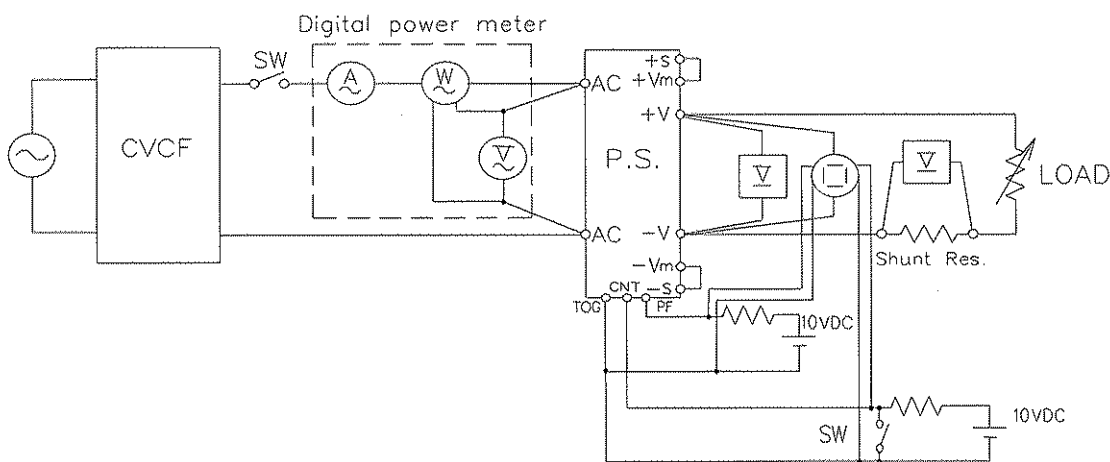


- (8) ON/OFFコントロール時出力立ち下がり特性
Output fall characteristics with ON/OFF CONTROL
Same as Output rise characteristics with ON/OFF CONTROL

- (9) 過渡応答（入力急変）特性 Dynamic line response characteristics
Same as Steady state data


- (10) 過渡応答（負荷急変）特性 Dynamic load response characteristics

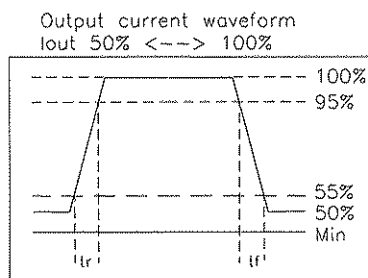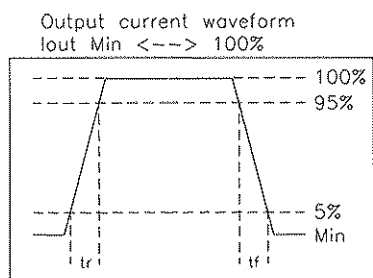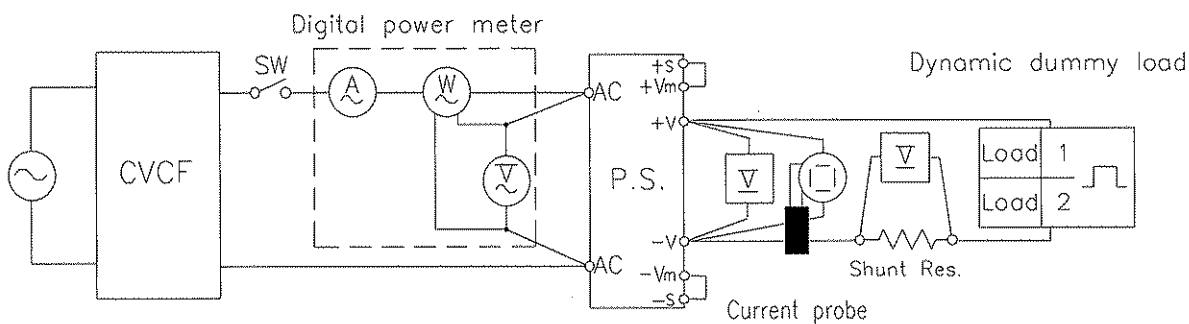

(11) 入力サージ電流 (突入電流) 特性 Inrush current characteristics

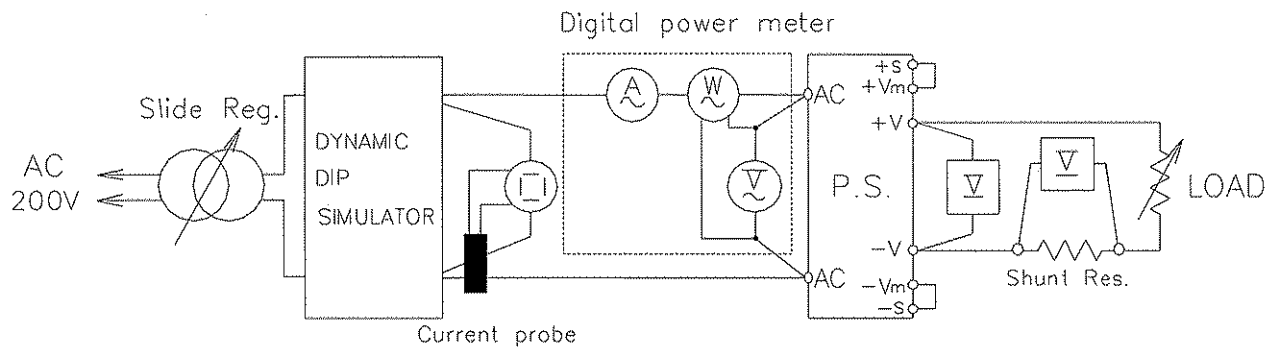


(12) リーク電流特性 Leakage current characteristics

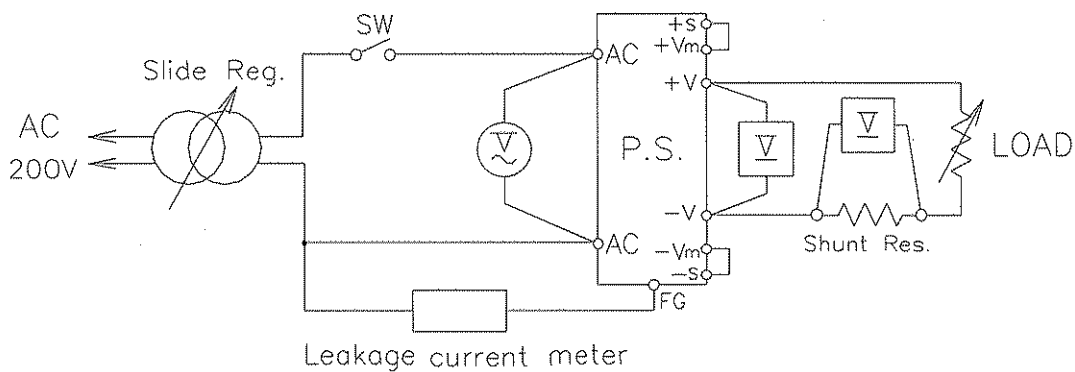


Range used---AC(For SIMPSON MODEL 229-2)

(13) 出力リップル、ノイズ特性 Output ripple and noise waveform

(a) Normal Mode (JEITA Standard RC-9131A)

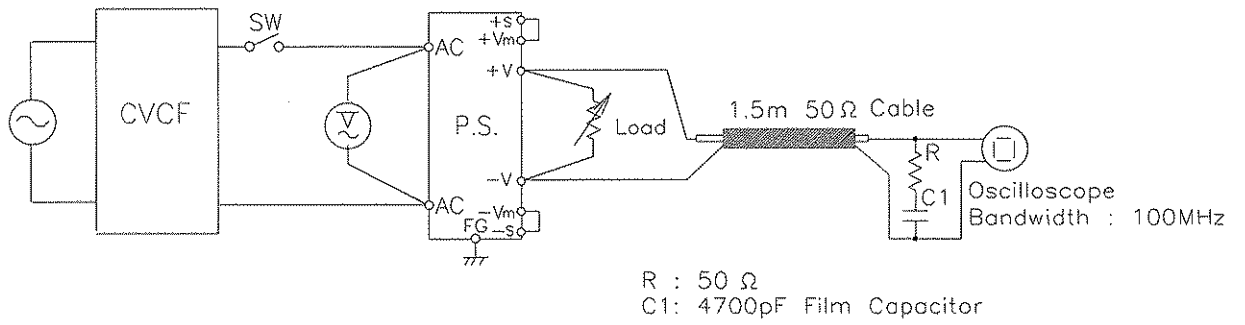

(b) Normal + Common Mode

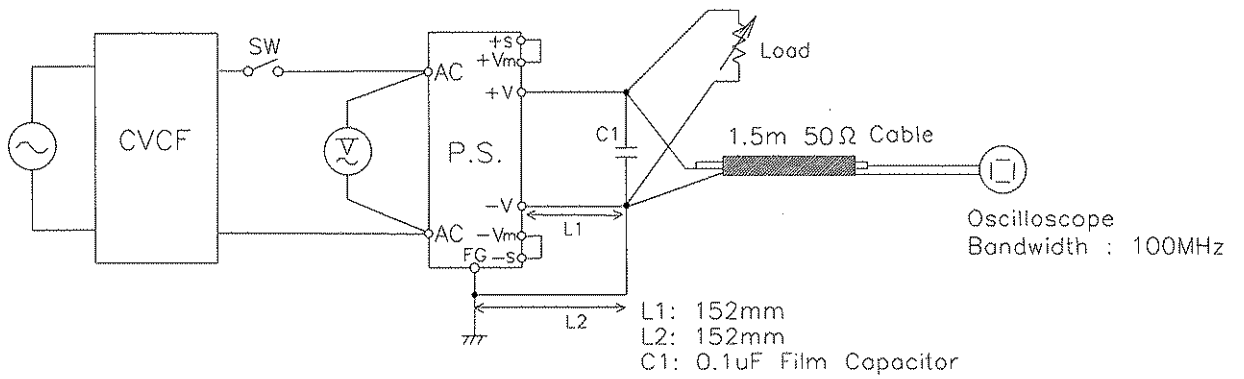

(14) スタンバイ電流 Standby current


Same as Steady state data

(15) EMI 特性

Electro-Magnetic Interference characteristics


(a) 雑音端子電圧 (帰還ノイズ)

Conducted Emission Noise

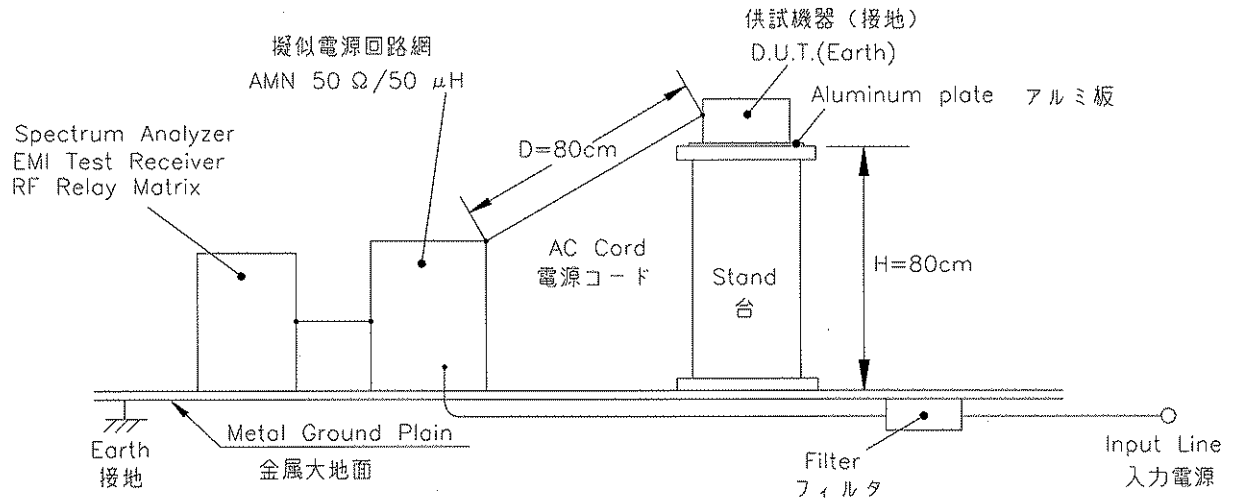

(b) 雑音電界強度 (輻射ノイズ)

Radiated Emission Noise

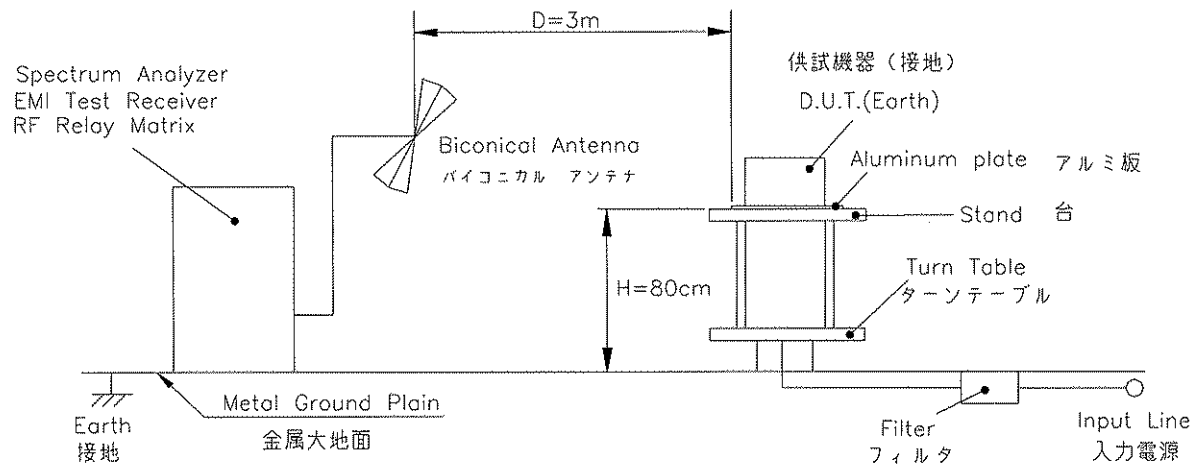

1.2 使用測定機器 List of equipment used

| | EQUIPMENT USED | MANUFACTURER | MODEL NO. |
|----|---------------------------------|------------------------------|---------------------|
| 1 | OSCILLOSCOPE | HITACHI DENSHI | V-1100A |
| 2 | DIGITAL STORAGE OSCILLOSCOPE | TEKTRONIX | TDS540B/TDS540D |
| 3 | DIGITAL STORAGE OSCILLOSCOPE | YOKOGAWA ELECT. | DL1740E/DL1740EL |
| 4 | DIGITAL MULTIMETER | YOKOGAWA ELECT. | 7544 01 |
| 5 | DIGITAL MULTIMETER | AGILENT | 34970A |
| 6 | DIGITAL POWER METER | YOKOGAWA ELECT. | WT110/WT210 |
| 7 | CURRENT PROBE/AMPLIFIER | TEKTRONIX | A6303/AM503 |
| 8 | DYNAMIC DUMMY LOAD | TAKASAGO | FK-1000L |
| 9 | SHUNT RESISTOR | YOKOGAWA ELECT. | 2215 |
| 10 | SLIDE REGULATOR | MATSUNAGA | SD-2650 |
| 11 | CVCF | TAKASAGO | AA2000XG |
| 12 | CVCF | KIKUSUI | PCR-2000L/PCR-4000L |
| 13 | LEAKAGE CURRENT METER | SIMPSON | 229-2 |
| 14 | DYNAMIC DIP SIMULATOR | TAKAMIZAWA CYBERNETICS | PSA-210 |
| 15 | CONTROLLED TEMP. CHAMBER | ESPEC | SPL-2KPH-A |
| 16 | SPECTRUM ANALYZER | ROHDE & SCHWARZ | FSA |
| 17 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESHS10 |
| 18 | EMI TEST RECEIVER | ROHDE & SCHWARZ | ESVS10 |
| 19 | RF RELAY MATRIX | ROHDE & SCHWARZ | PSU |
| 20 | AMN | KYORITU DENSHI | KNW-242 |
| 21 | ANTENA(BICONICAL ANTENA) | SCHWARZBECK | BBA9106 |
| 22 | UNIVERSAL POWER ANALYZER | VOLTECH | PM3000A |
| 23 | SINGLE-PHASE MASTER | NF ELECTRONIC INSTRUMENTS | 4420 |
| 24 | REFERENCE IMPEDANCE NETWORK 20A | NF ELECTRONIC INSTRUMENTS | 4150 |

2. 特性データ Characteristics

2.1 静特性 Steady state data

(1) 入力・負荷・温度変動 Regulation - line and load, Temperature drift

5V

1. Regulation - line and load

Condition Ta : 25°C

| Iout \ Vin | 85VAC | 100VAC | 200VAC | 265VAC | line regulation | |
|-----------------|--------|--------|--------|--------|-----------------|--------|
| 0% | 5.014V | 5.014V | 5.014V | 5.014V | 0mV | 0.000% |
| 50% | 5.013V | 5.014V | 5.013V | 5.013V | 1mV | 0.020% |
| 100% | 5.013V | 5.013V | 5.013V | 5.013V | 0mV | 0.000% |
| load regulation | 1mV | 1mV | 1mV | 1mV | | |
| | 0.020% | 0.020% | 0.020% | 0.020% | | |

2. Temperature drift

Conditions Vin=100VAC

Iout=100%

| Ta | -10°C | +25°C | +50°C | temperature stability | |
|------|--------|--------|--------|-----------------------|--------|
| Vout | 5.010V | 5.013V | 5.013V | 3mV | 0.066% |

12V

1. Regulation - line and load

Condition Ta : 25°C

| Iout \ Vin | 85VAC | 100VAC | 200VAC | 265VAC | line regulation | |
|-----------------|---------|---------|---------|---------|-----------------|--------|
| 0% | 12.025V | 12.025V | 12.025V | 12.025V | 0mV | 0.000% |
| 50% | 12.024V | 12.025V | 12.024V | 12.025V | 1mV | 0.008% |
| 100% | 12.025V | 12.025V | 12.024V | 12.025V | 1mV | 0.008% |
| load regulation | 1mV | 0mV | 1mV | 0mV | | |
| | 0.008% | 0.000% | 0.008% | 0.000% | | |

2. Temperature drift

Conditions Vin=100VAC

Iout=100%

| Ta | -10°C | +25°C | +50°C | temperature stability | |
|------|---------|---------|---------|-----------------------|--------|
| Vout | 12.019V | 12.024V | 12.031V | 12mV | 0.098% |

24V

1. Regulation - line and load

Condition Ta : 25°C

| Iout \ Vin | 85VAC | 100VAC | 200VAC | 265VAC | line regulation | |
|-----------------|---------|---------|---------|---------|-----------------|--------|
| 0% | 24.009V | 24.010V | 24.011V | 24.011V | 2mV | 0.008% |
| 50% | 24.010V | 24.011V | 24.011V | 24.011V | 1mV | 0.004% |
| 100% | 24.011V | 24.012V | 24.012V | 24.012V | 1mV | 0.004% |
| load regulation | 2mV | 2mV | 1mV | 1mV | | |
| | 0.008% | 0.008% | 0.004% | 0.004% | | |

2. Temperature drift

Conditions Vin=100VAC

Iout=100%

| Ta | -10°C | +25°C | +50°C | temperature stability | |
|------|---------|---------|---------|-----------------------|--------|
| Vout | 23.980V | 24.011V | 24.030V | 50mV | 0.210% |


(2) 出力電圧・リップルノイズ電圧対入力電圧

Output voltage and Ripple noise voltage vs. Input voltage


Conditions

Iout : 100 %
 Ta : -10 °C -----
 25 °C - - - - -
 50 °C _____


5V

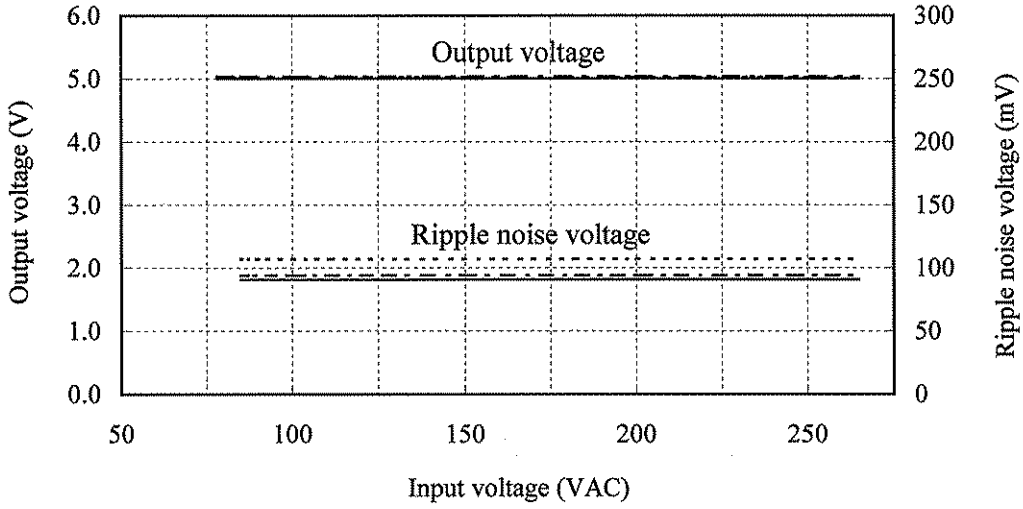

12V

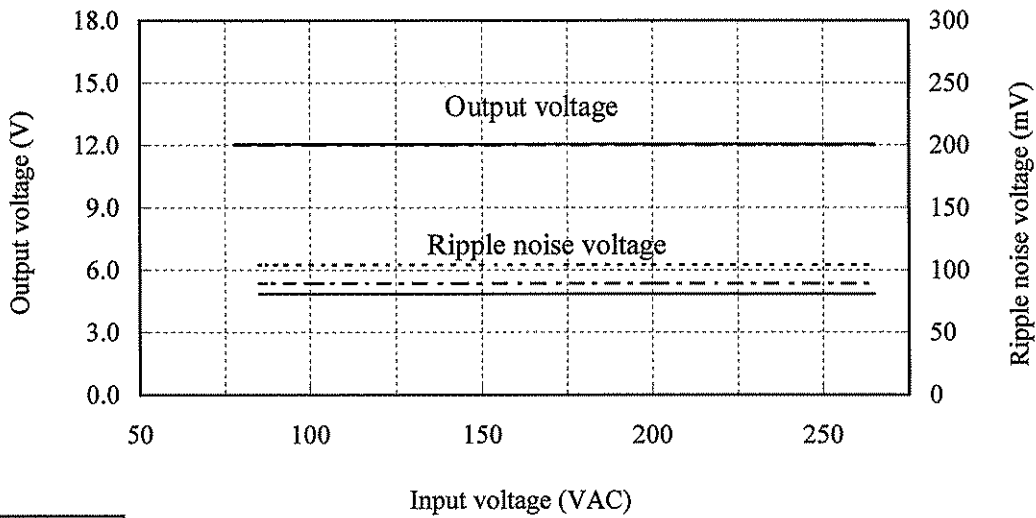

24V

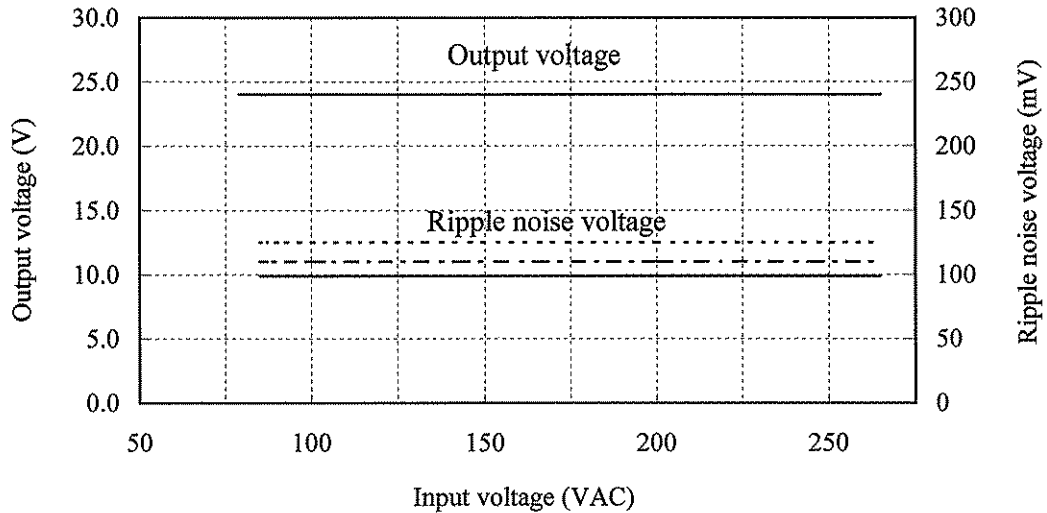


(3) 効率・入力電流対出力電流


Efficiency and Input current vs. Output current

Conditions Vin : 85 VAC -----
 : 100 VAC - - - - -
 : 200 VAC ————
 : 265 VAC - - - - -
 Ta : 25 °C


5V

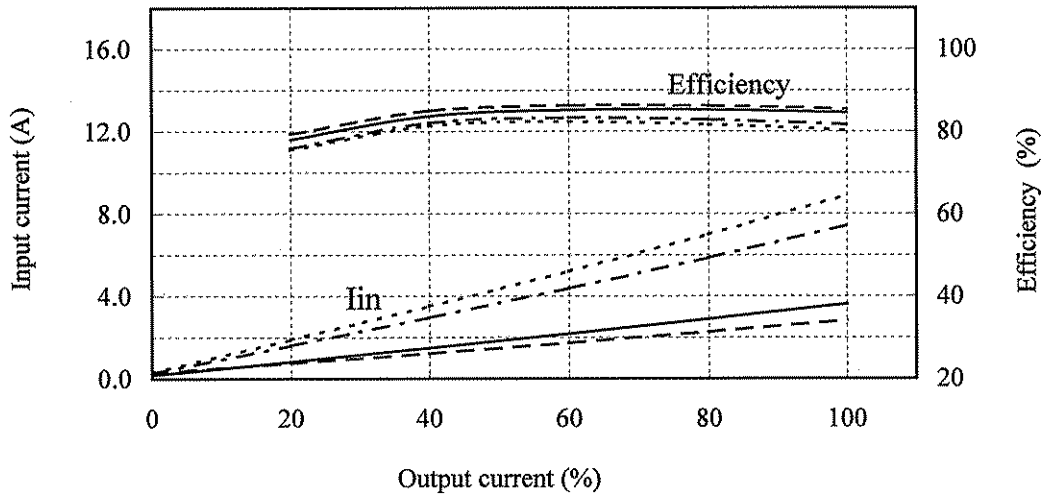

12V

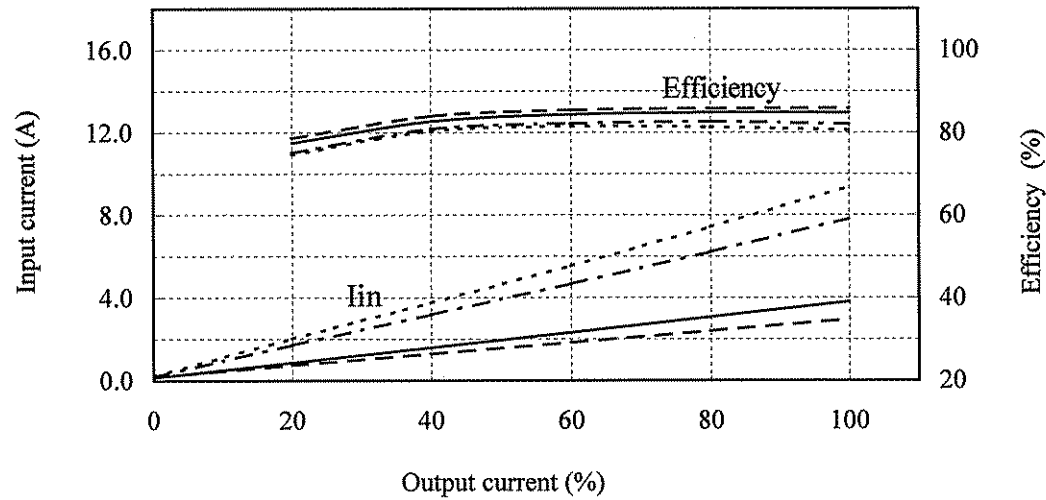

24V

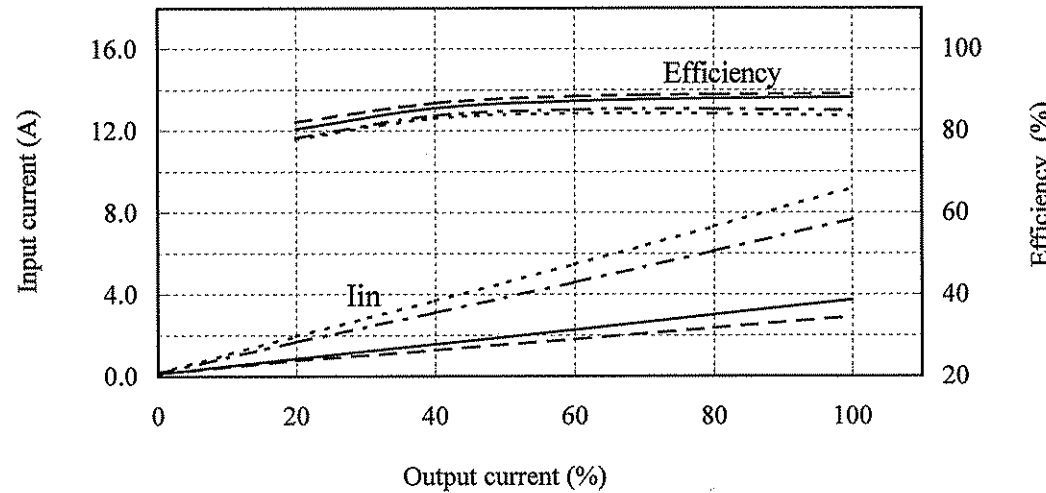


(4) 力率・入力電流対出力電流


Power factor and Input current vs. Output current

Conditions Vin : 85 VAC -----
 : 100 VAC - - - - -
 : 200 VAC ————
 : 265 VAC - - - - -
 Ta : 25 °C


5V

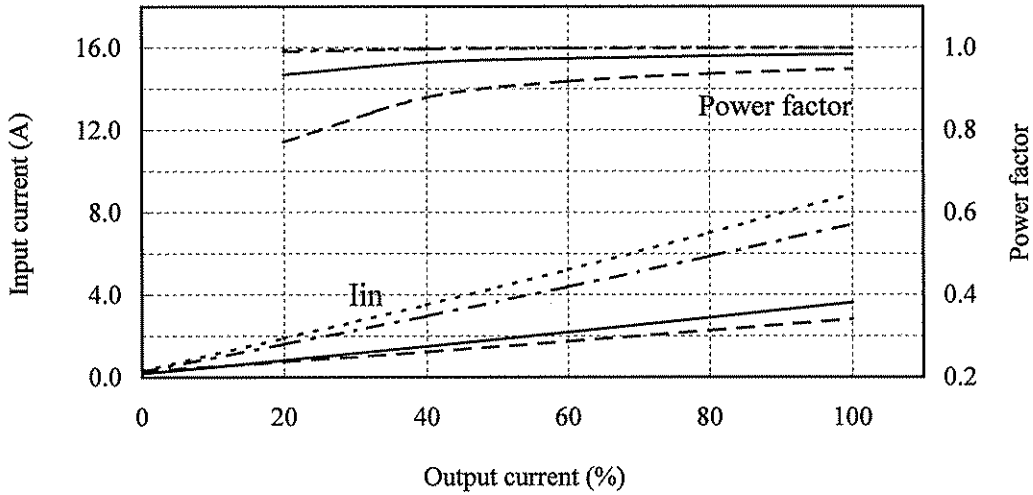

12V

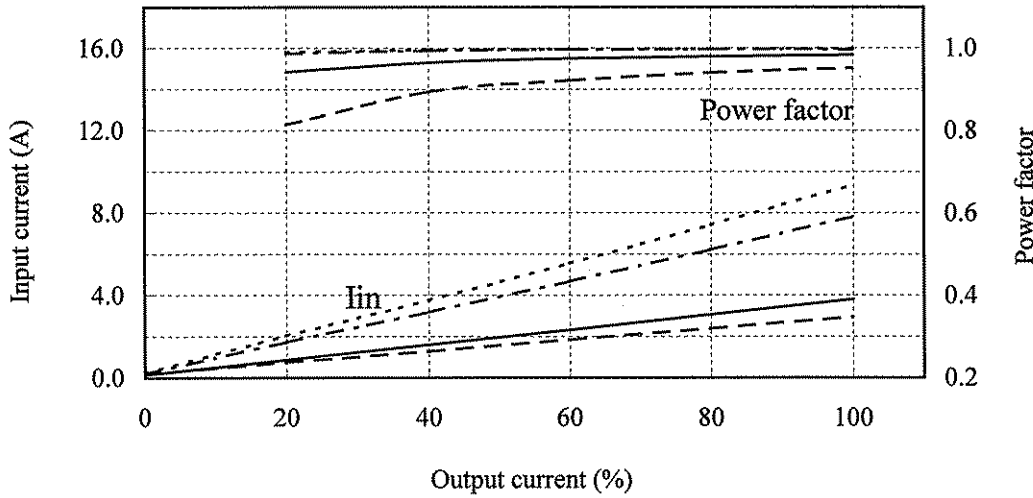

24V

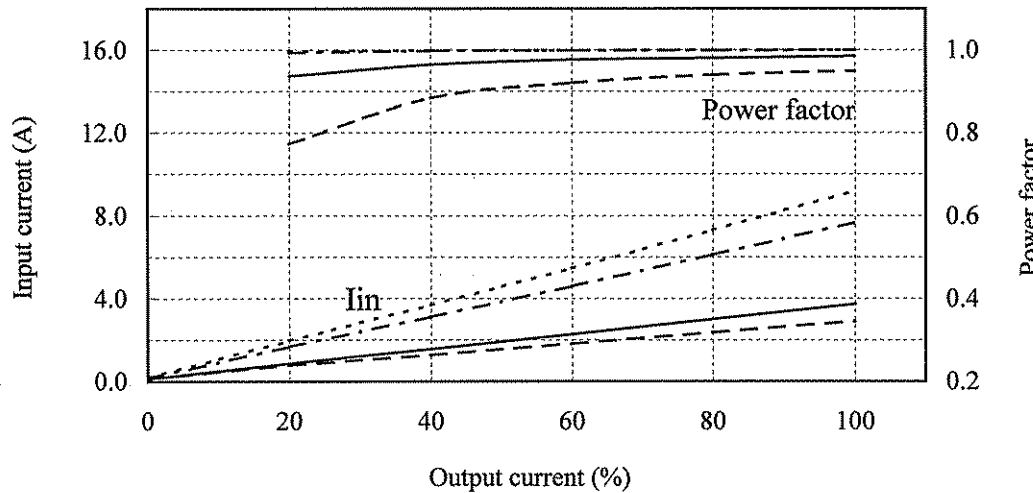

2.2 通電ドリフト特性


Warm up voltage drift characteristics

Conditions V_{in} : 100 VAC


I_{out} : 100 %

T_a : 25 °C


5V

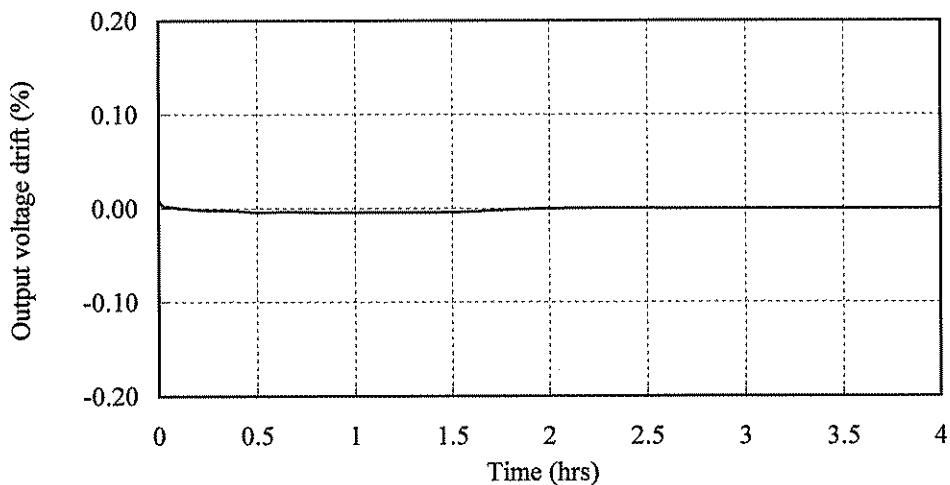

12V

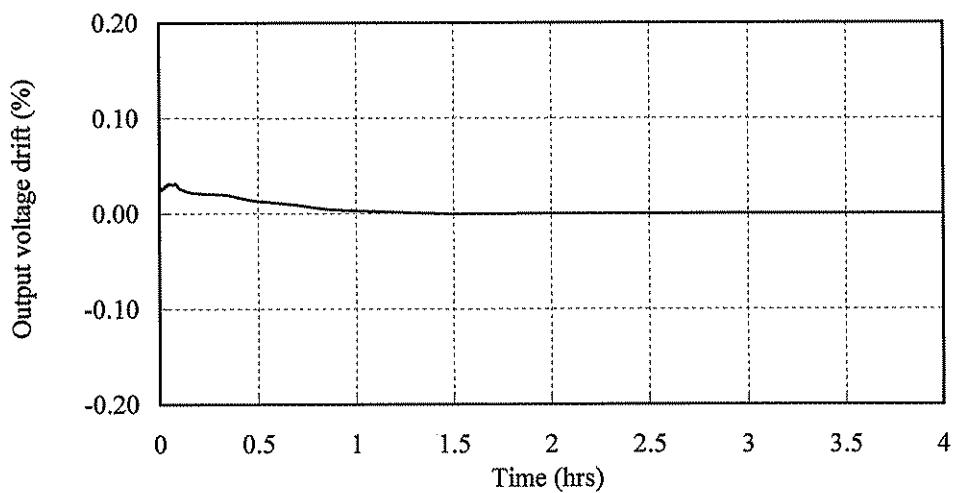

24V

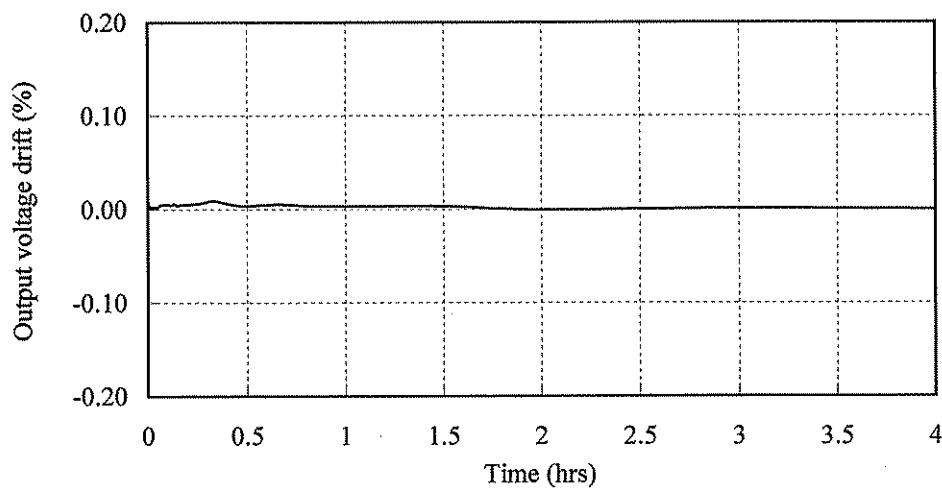


2.3 過電流保護特性


Over current protection (OCP) characteristics

Conditions Vin : 85 VAC -----
100 VAC -----
200 VAC -----
265 VAC -----
Ta : 25 °C


5V

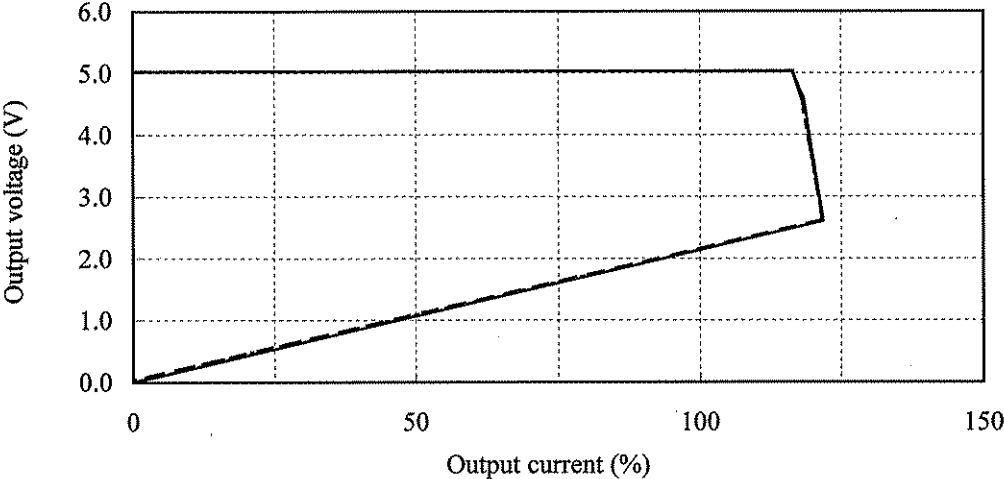

12V

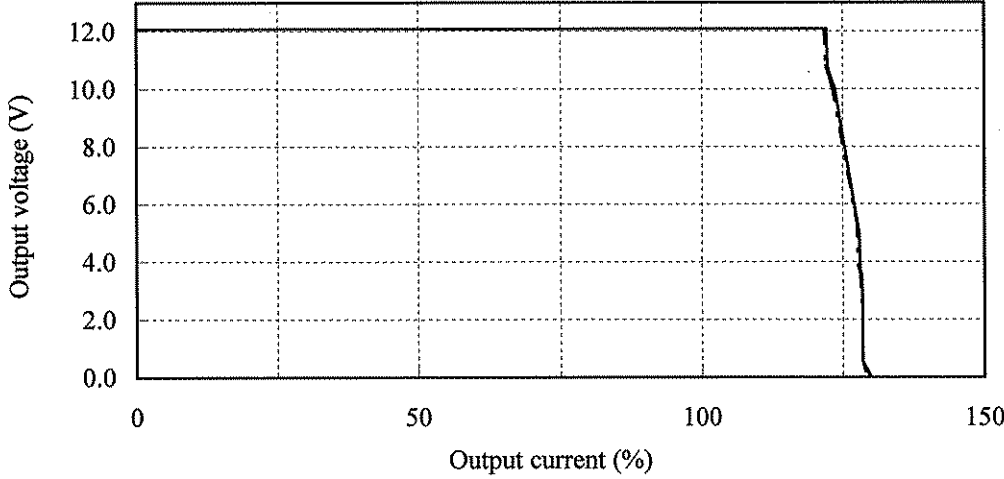

24V

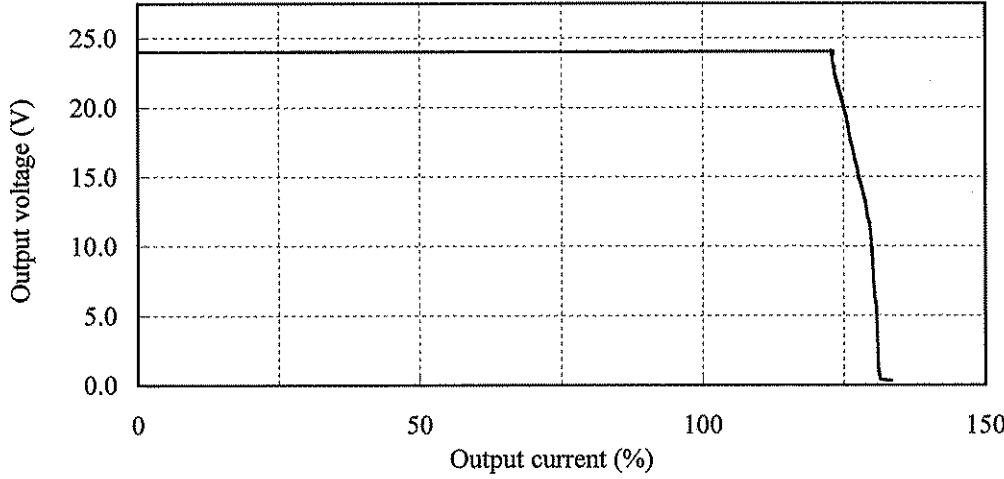

2.3 過電流保護特性

Over current protection (OCP) characteristics

Conditions V_{in} : 100 VAC


T_a : -10 °C

25 °C


50 °C




5V

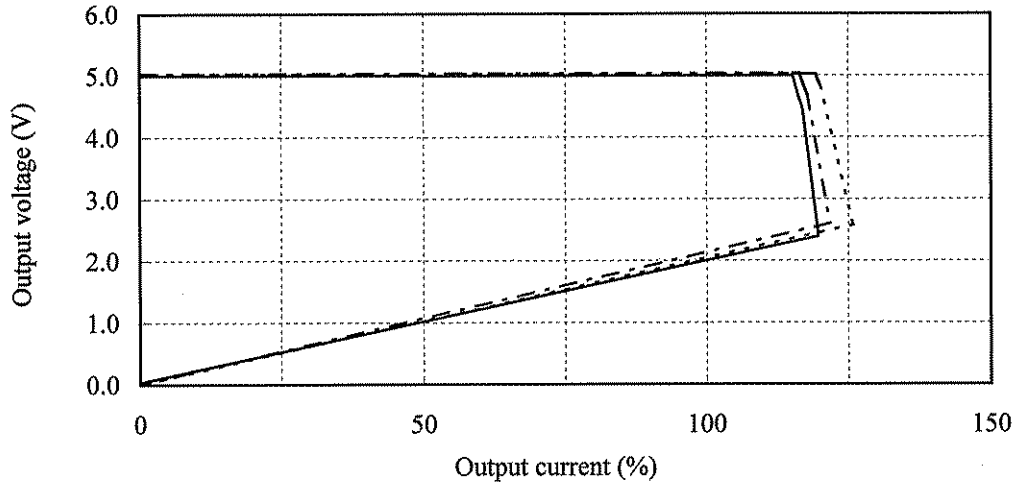

12V

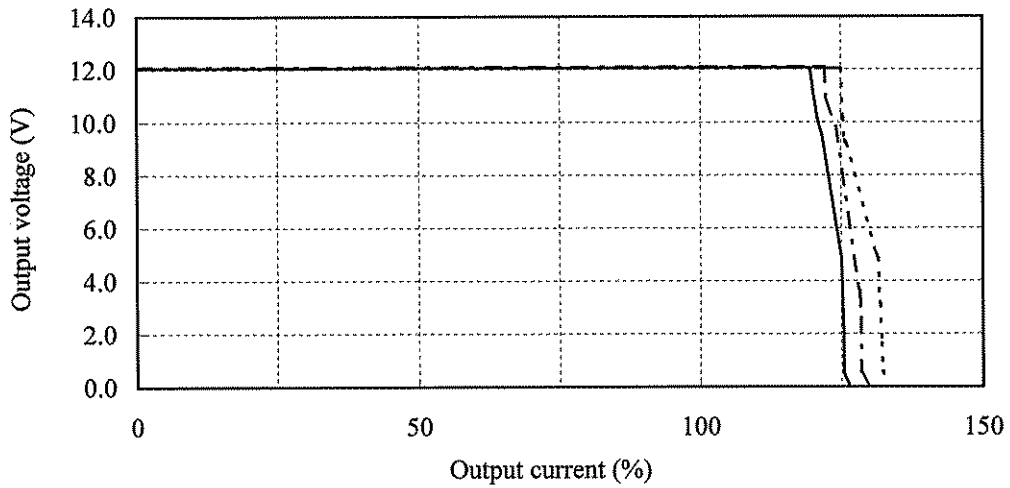

24V

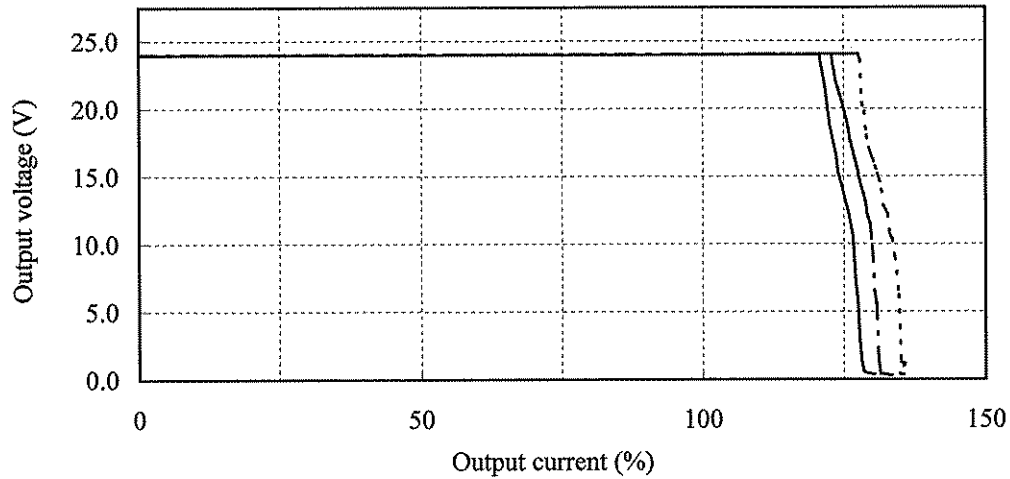

2.4 過電圧保護特性


Over voltage protection (OVP) characteristics

Conditions V_{in} : 100 VAC


I_{out} : 0 %

T_a : 25 °C


5V

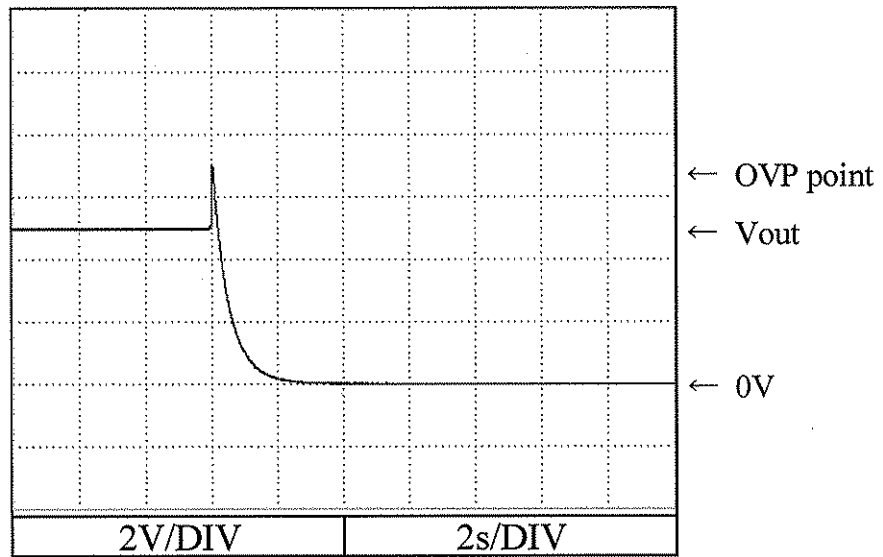

12V

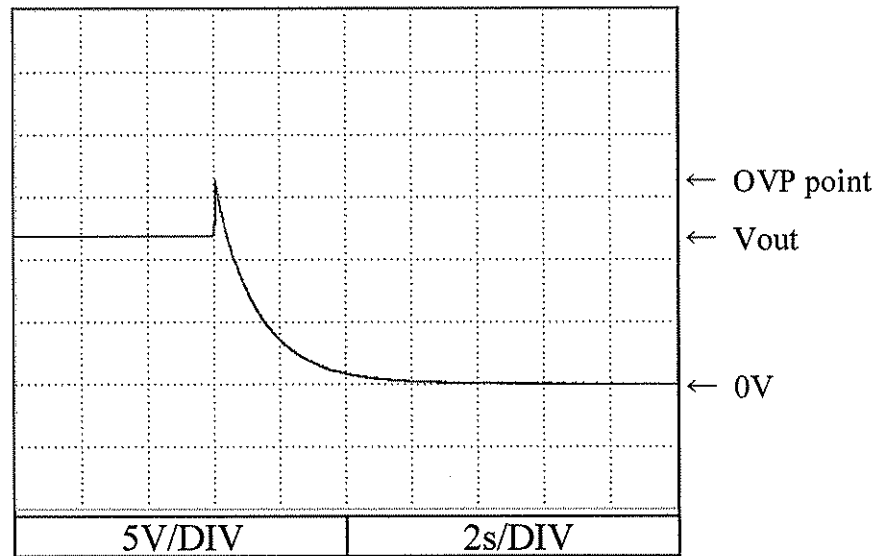

24V

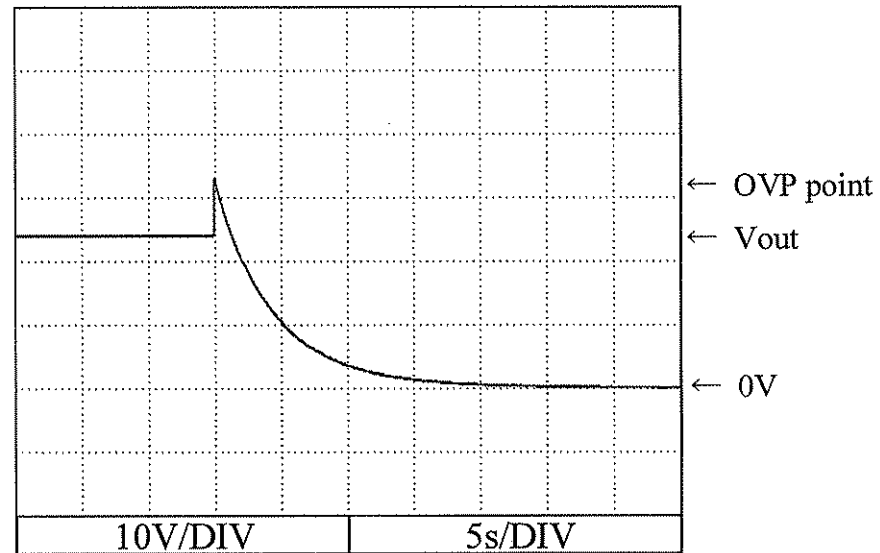


2.5 出力立ち上がり特性

Output rise characteristics


Conditions Vin : 85 VAC (A)
 100 VAC (B)
 200 VAC (C)
 265 VAC (D)

Iout : 0 %
 Ta : 25 °C


5V

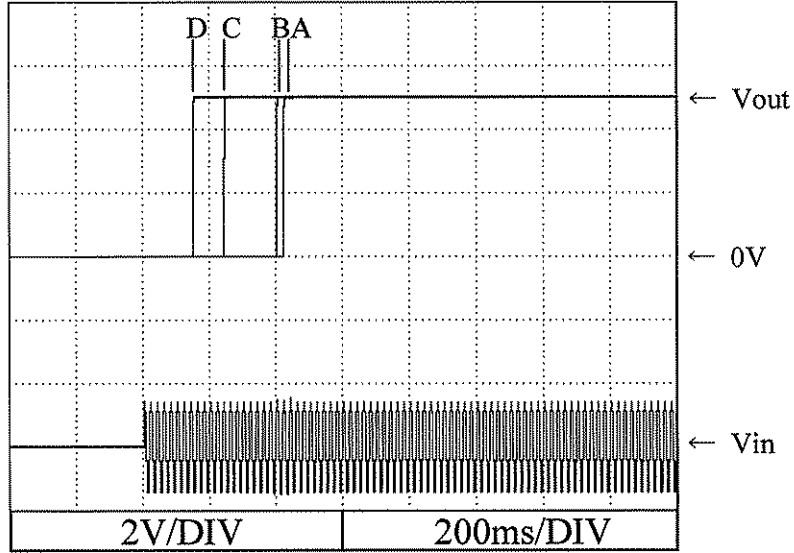

12V

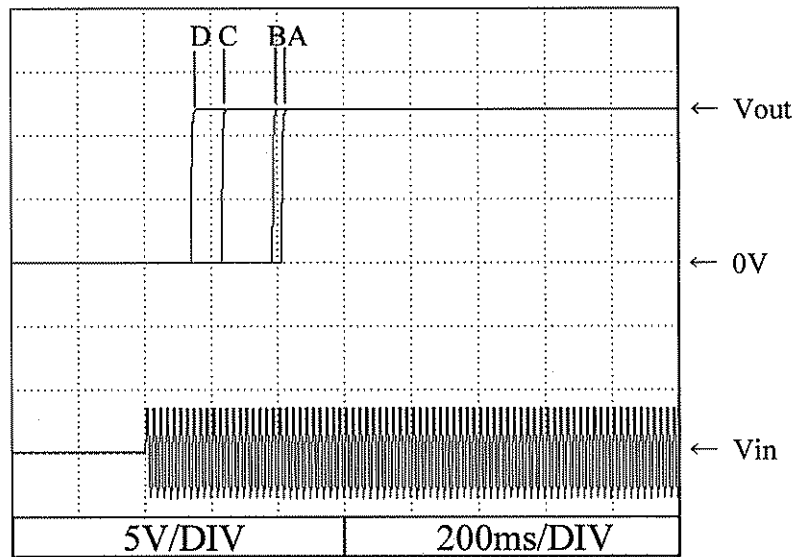

24V

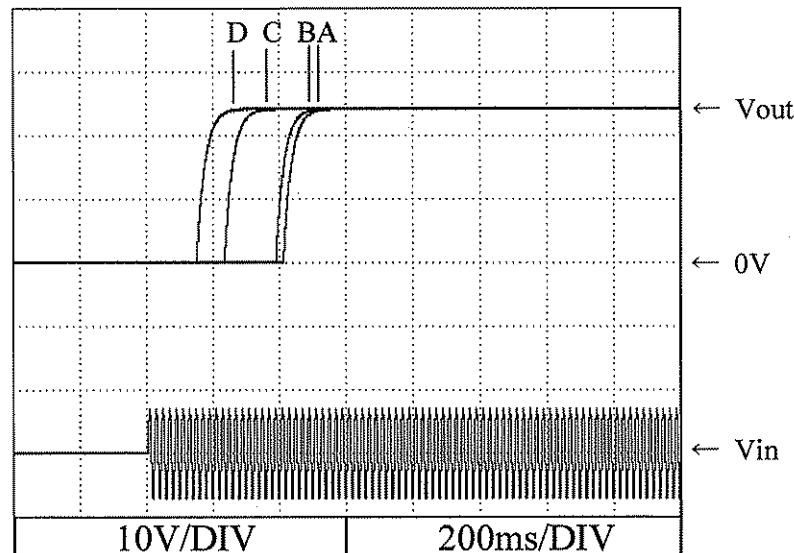


2.5 出力立ち上がり特性

Output rise characteristics


Conditions Vin : 85 VAC (A)
 100 VAC (B)
 200 VAC (C)
 265 VAC (D)

Iout : 100 %
 Ta : 25 °C


5V

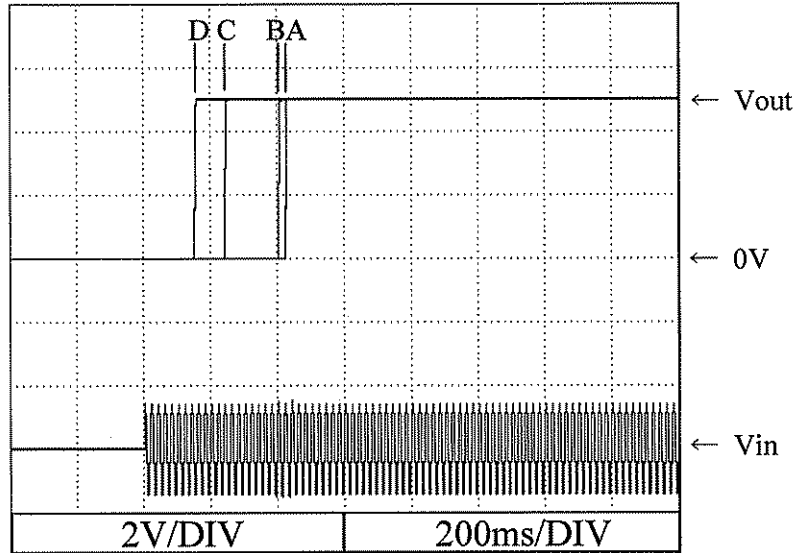

12V

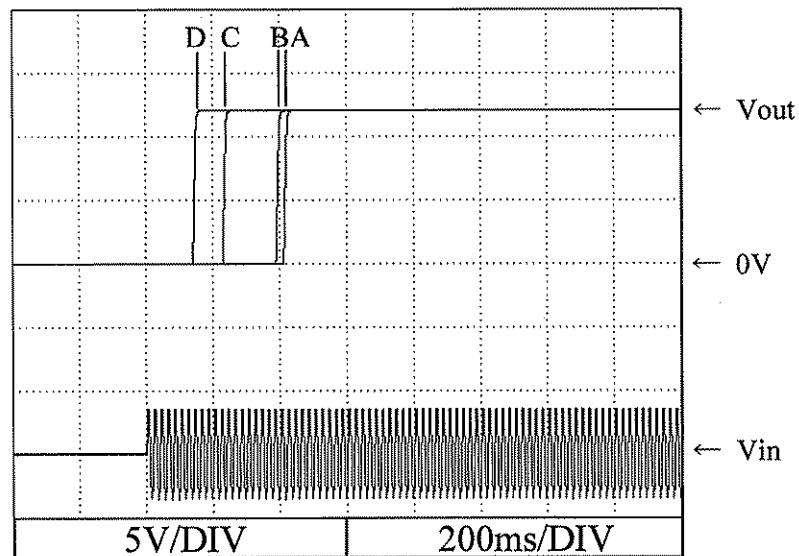

24V

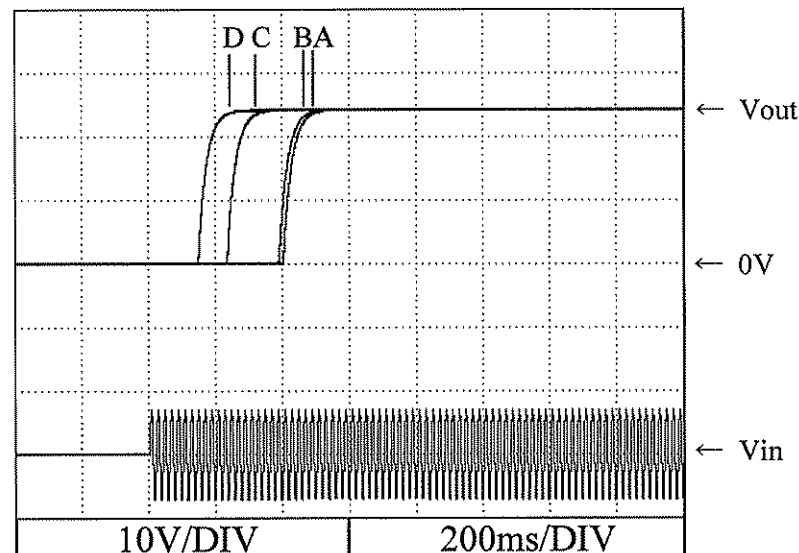


2.6 出力立ち下がり特性


Output fall characteristics

Conditions Vin : 85 VAC (A)
 100 VAC (B)
 200 VAC (C)
 265 VAC (D)
 Iout : 0 %
 Ta : 25 °C


5V

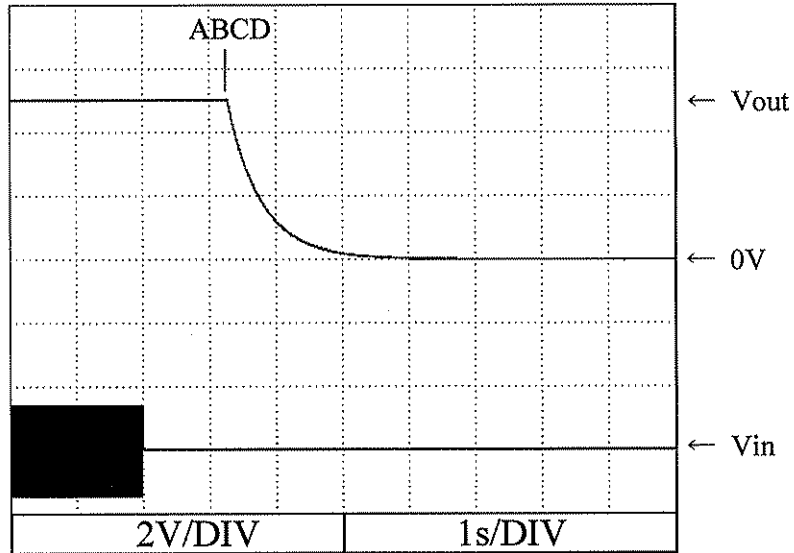

12V

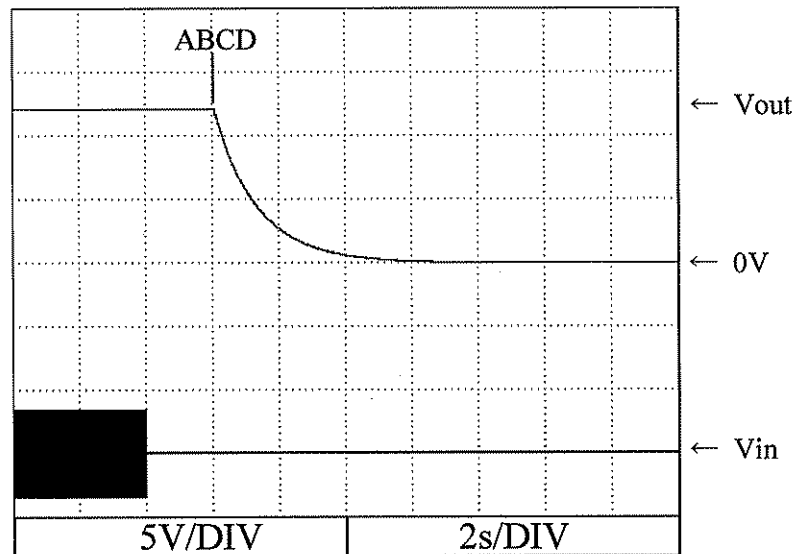

24V

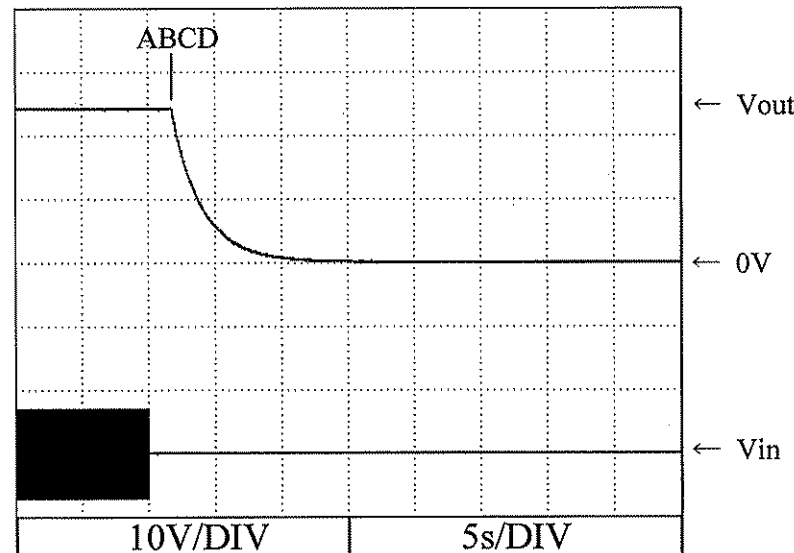


2.6 出力立ち下がり特性

Output fall characteristics


Conditions Vin : 85 VAC (A)
 100 VAC (B)
 200 VAC (C)
 265 VAC (D)

Iout : 100 %
 Ta : 25 °C


5V

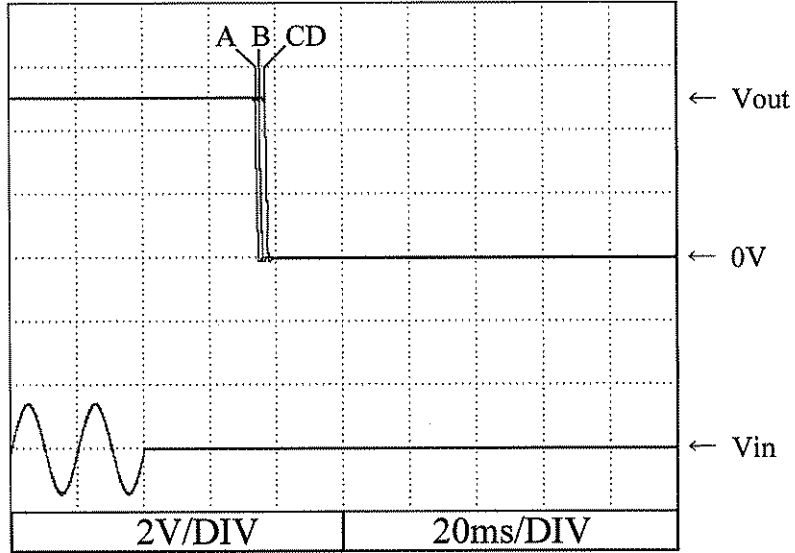

12V

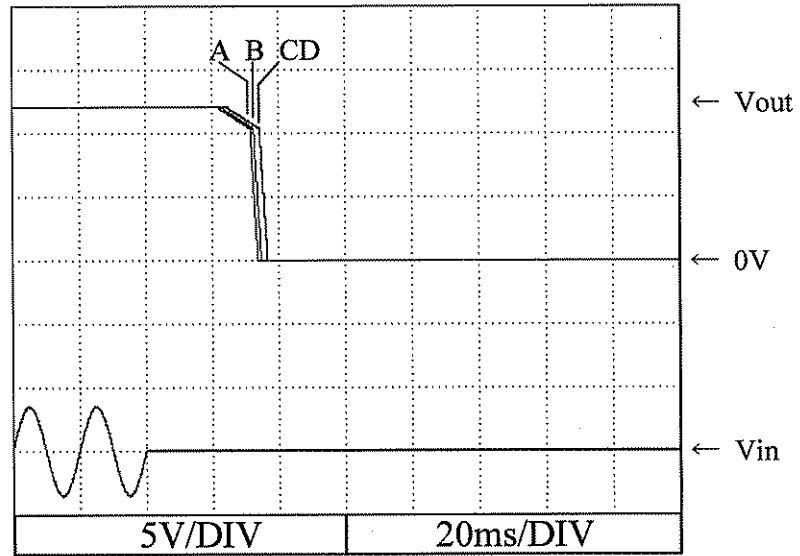

24V

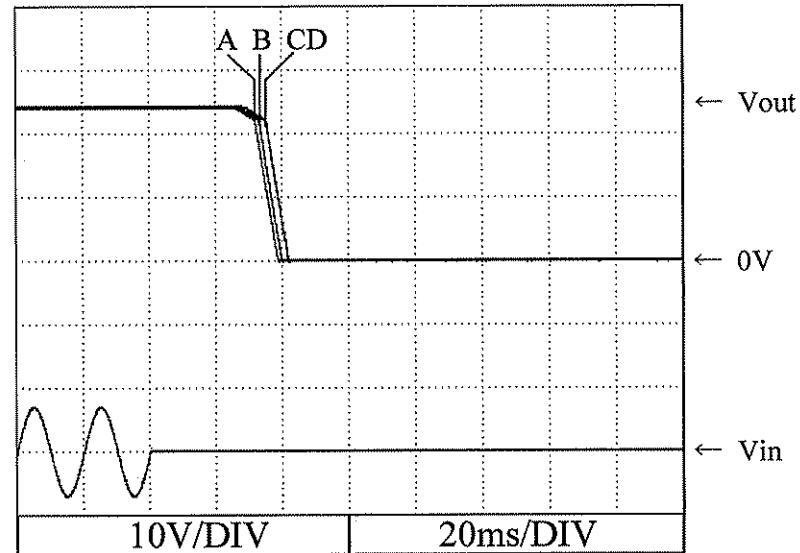

2.7 ON/OFFコントロール時出力立ち上がり特性


Output rise characteristics with ON/OFF CONTROL

Conditions V_{in} : 100 VAC


I_{out} : 100 %

T_a : 25 °C


5V

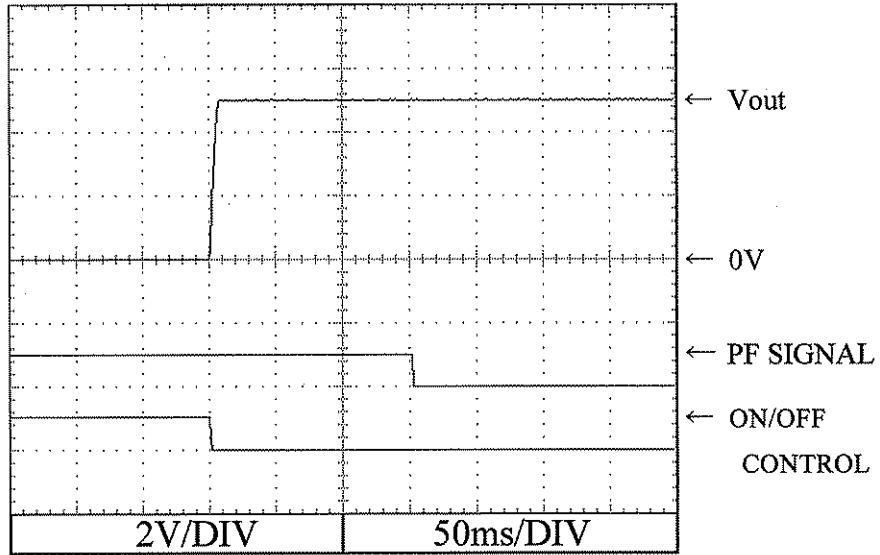

12V

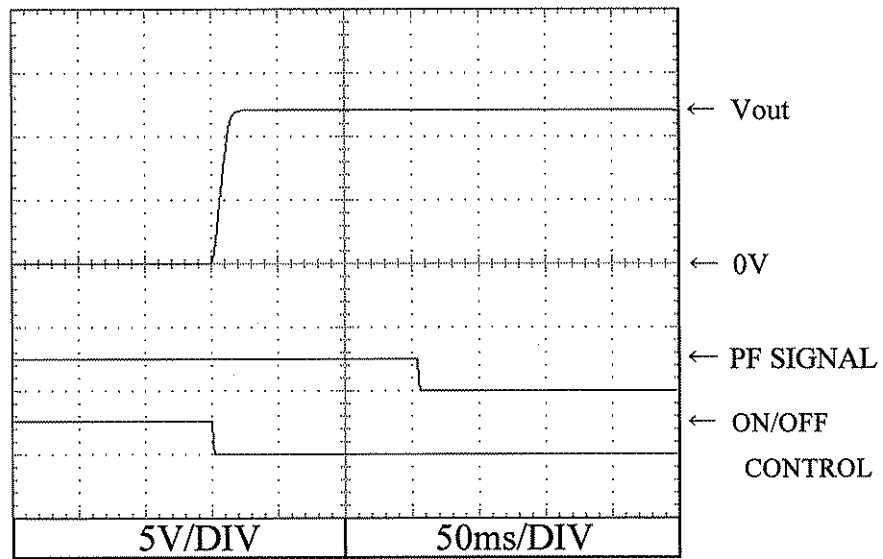

24V

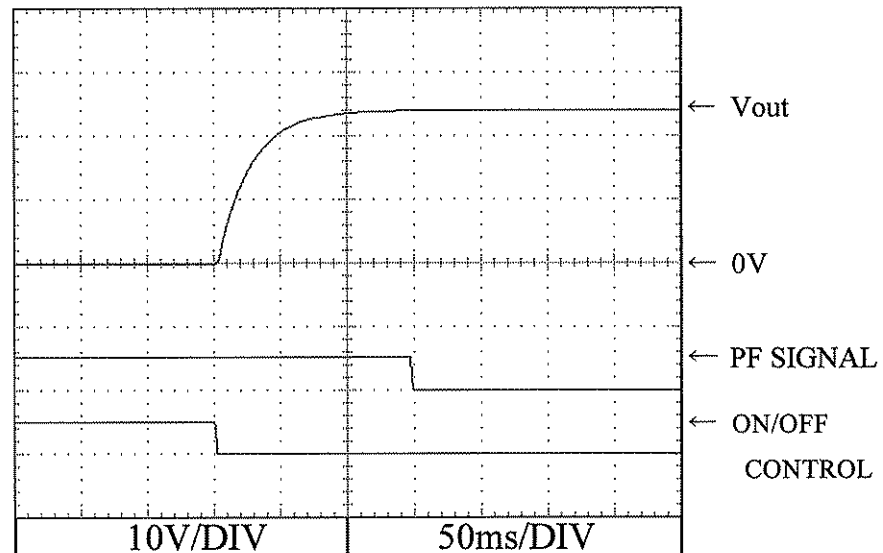

2.8 ON/OFFコントロール時出力立ち下がり特性


Output fall characteristics with ON/OFF CONTROL

Conditions V_{in} : 100 VAC


I_{out} : 100 %

T_a : 25 °C


5V

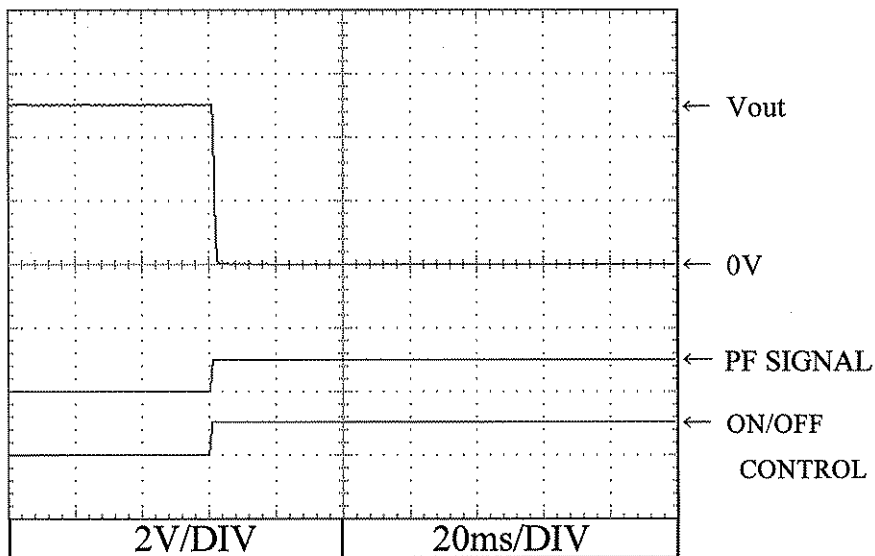

12V

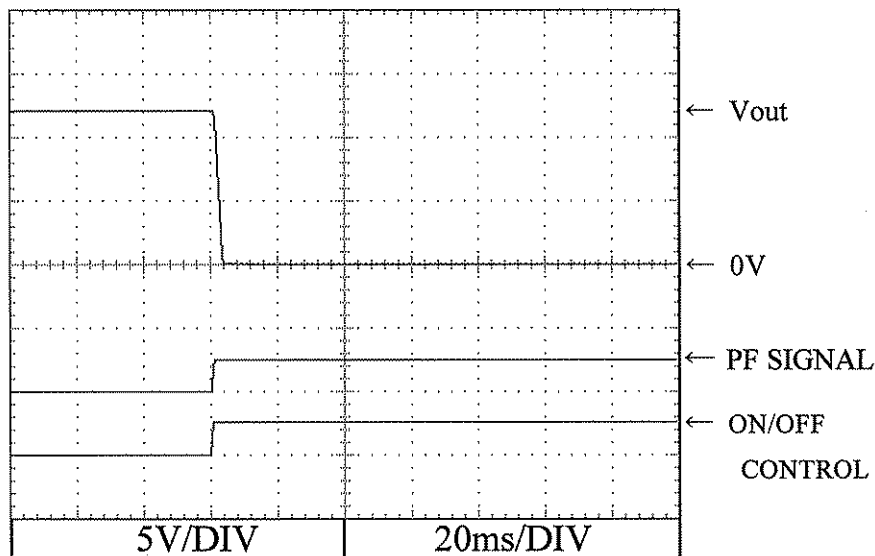


24V

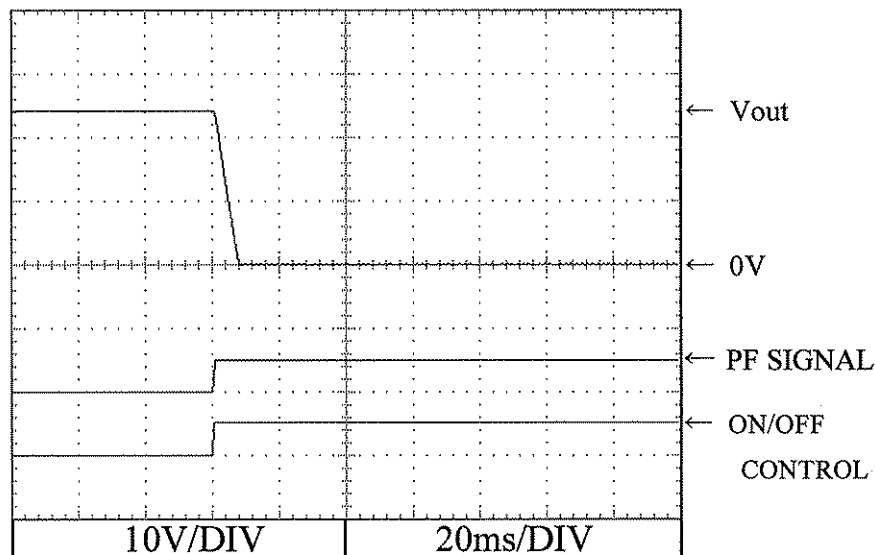


2.9 出力保持時間特性
Hold up time characteristics

Conditions V_{in} : 100 VAC -----
 200 VAC ————
 T_a : 25 °C


5V

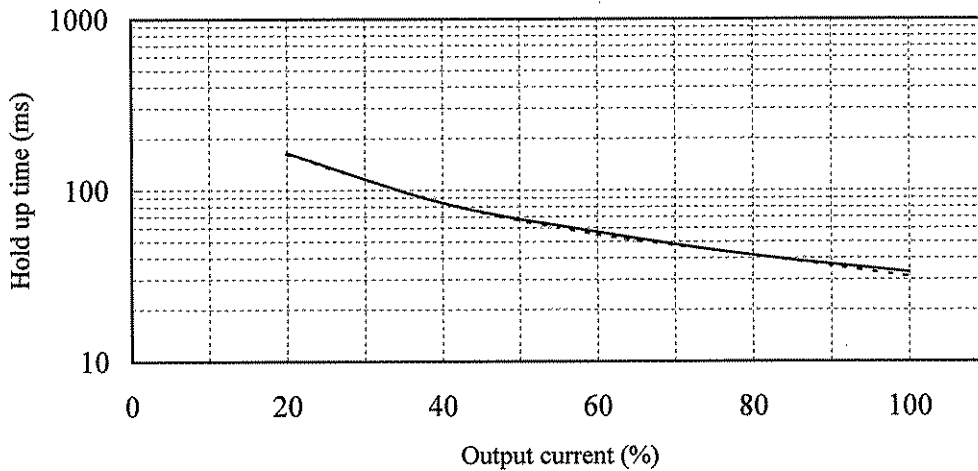

12V

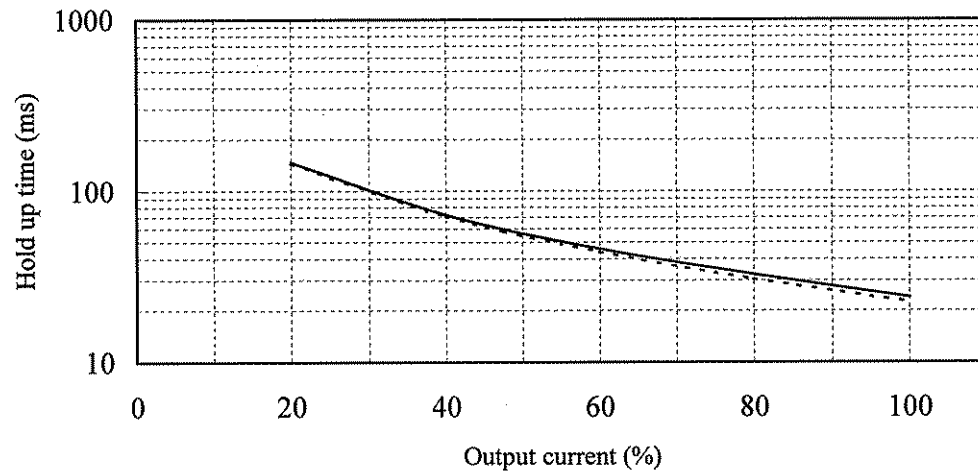

24V

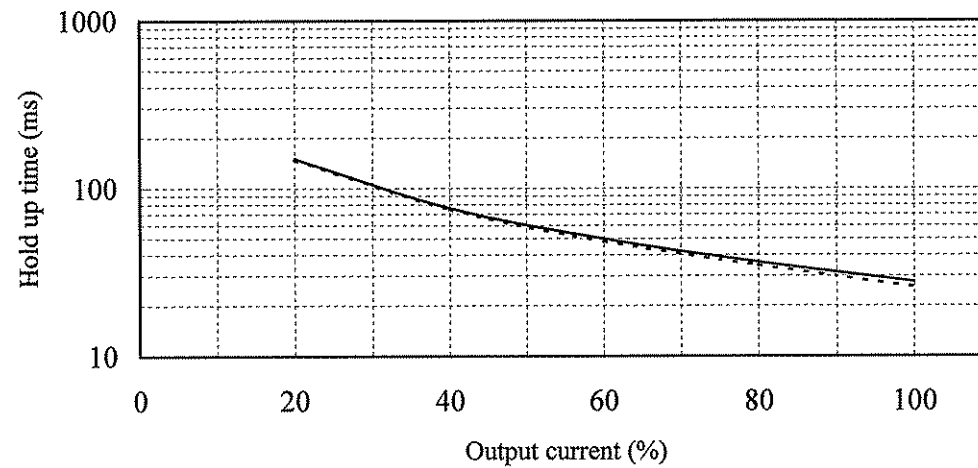


2.10 過渡応答 (入力急変) 特性


Dynamic line response characteristics

Conditions V_{in} : 85 VAC \leftrightarrow 132VAC (A)
170 VAC \leftrightarrow 265VAC (B)
 I_{out} : 100 %
 T_a : 25 °C


5V

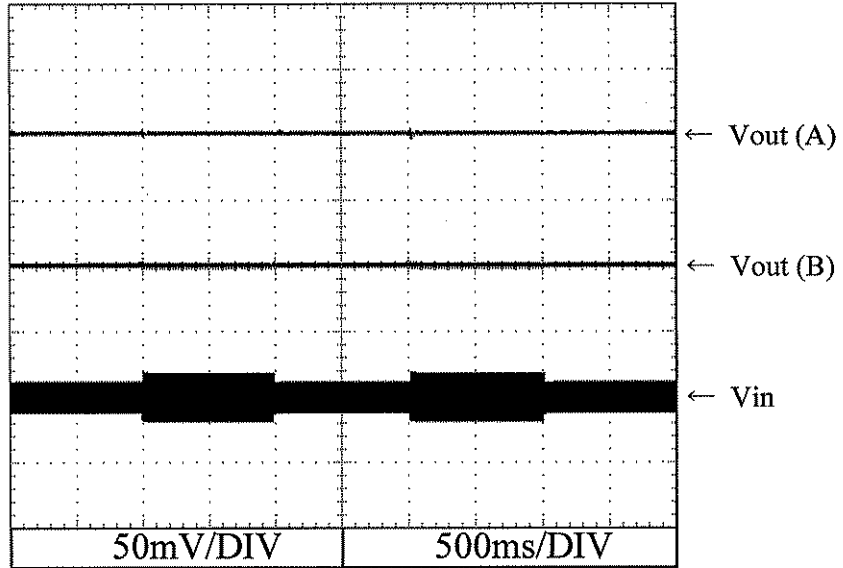

12V

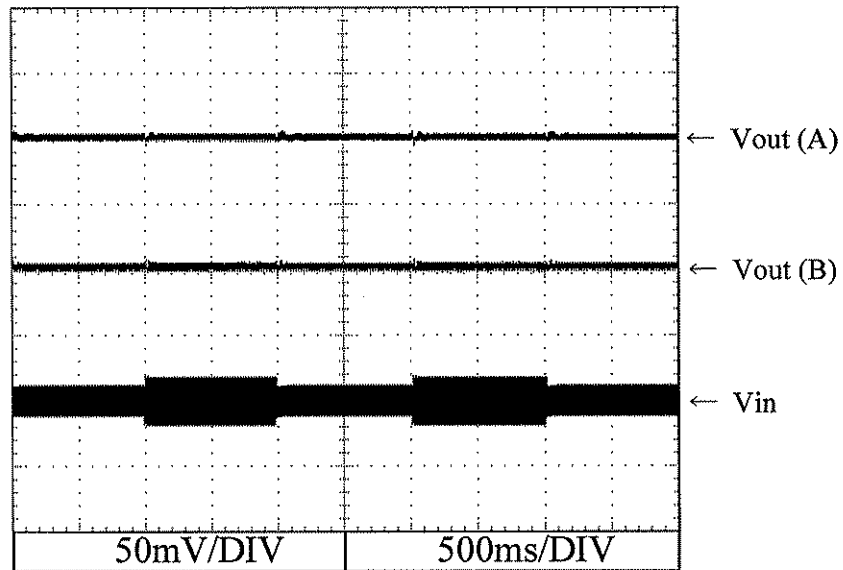

24V


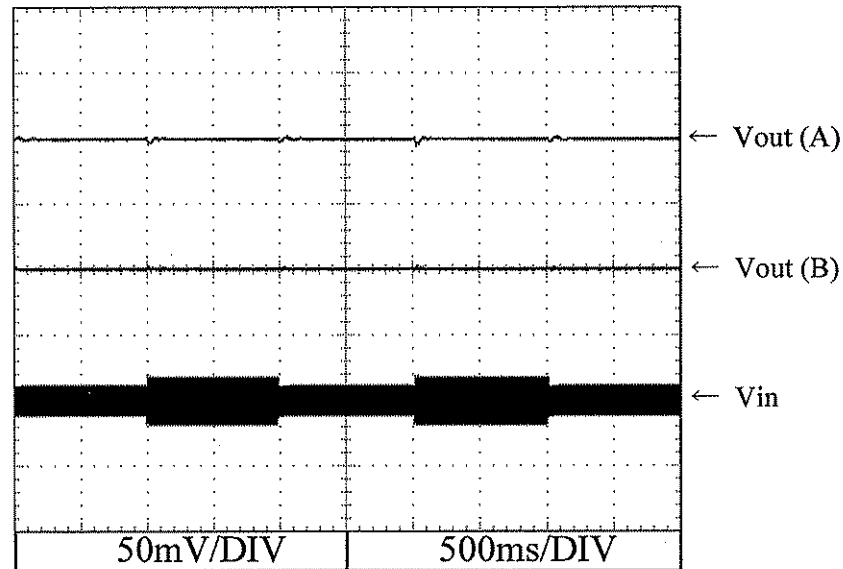


2.11 過渡応答 (負荷急変) 特性
Dynamic load response characteristics



Conditions Vin : 100 VAC
Ta : 25 °C

5V

f=100Hz

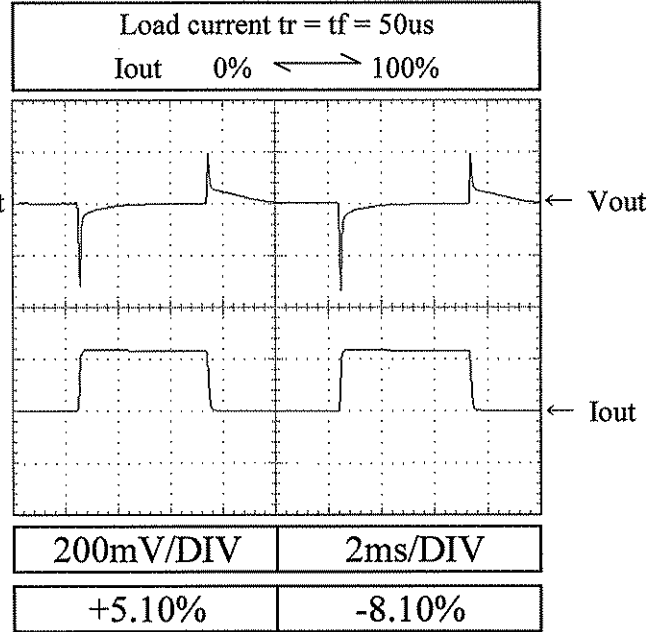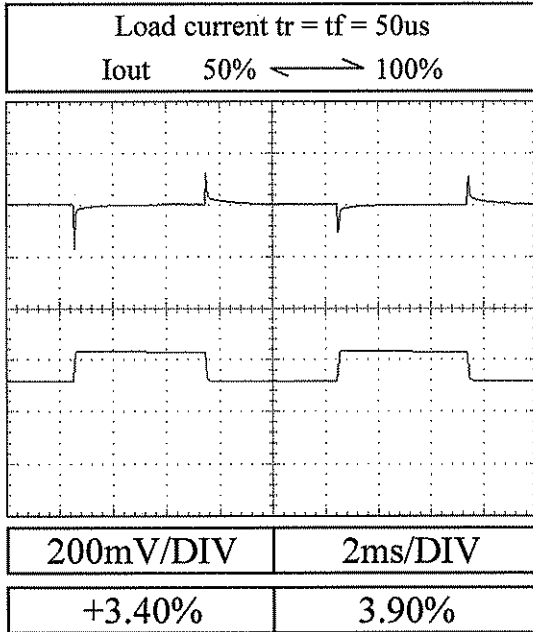

f=1kHz

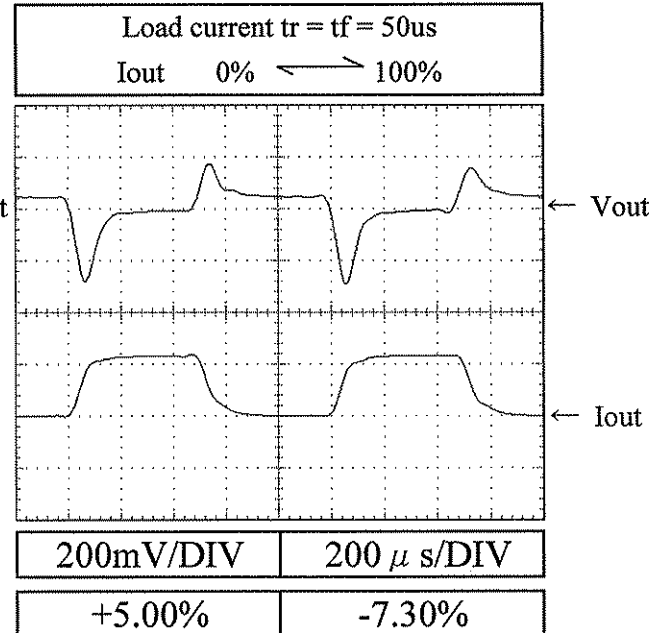
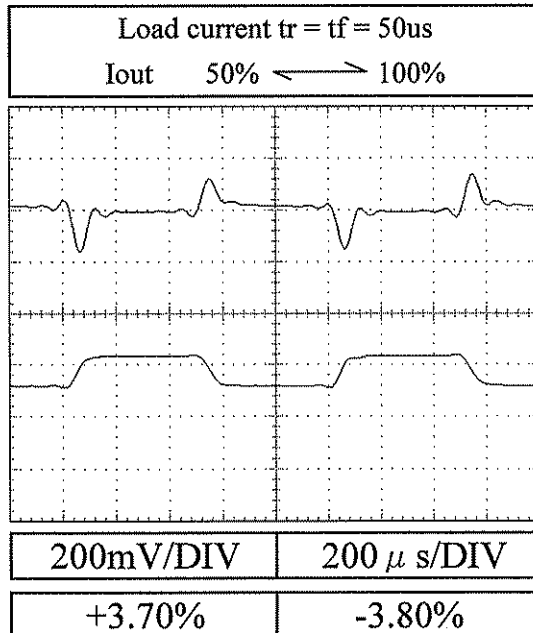


2.11 過渡応答 (負荷急変) 特性
Dynamic load response characteristics



Conditions V_{in} : 100 VAC
 T_a : 25 °C

12V

$f=100\text{Hz}$

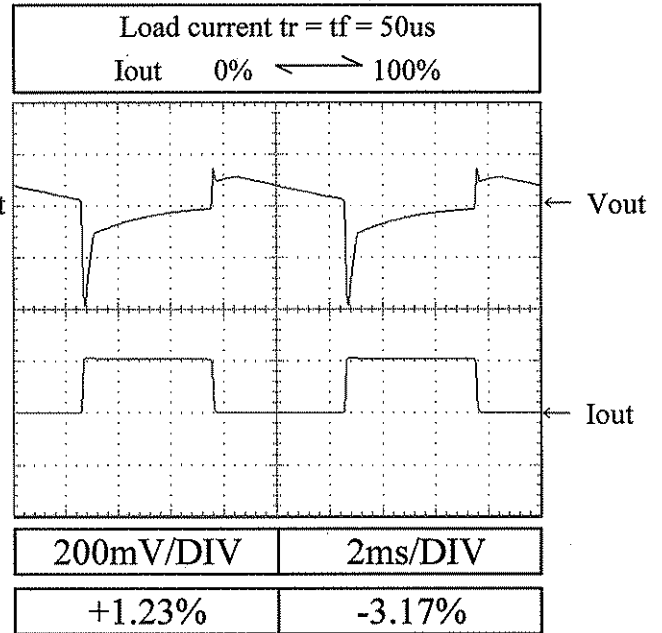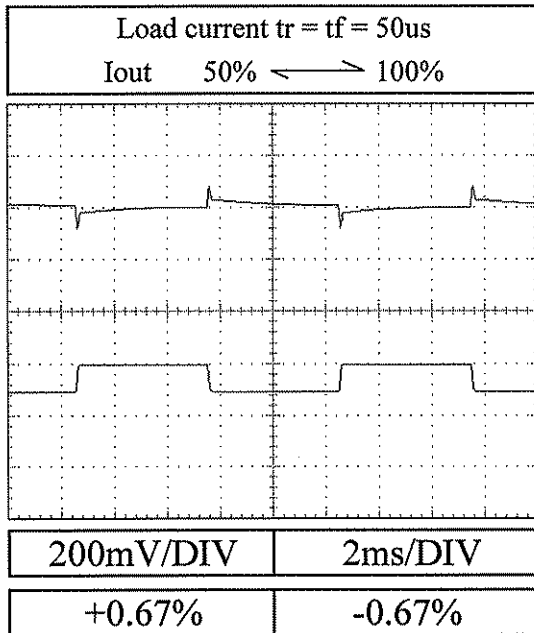

$f=1\text{kHz}$

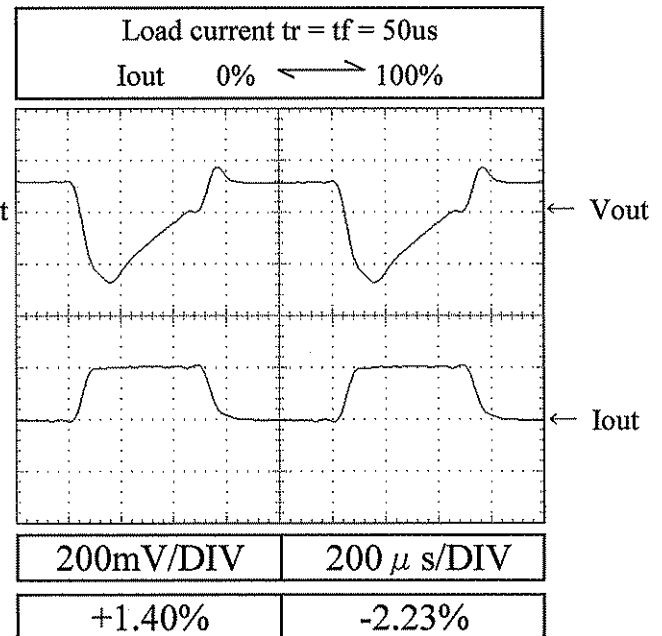
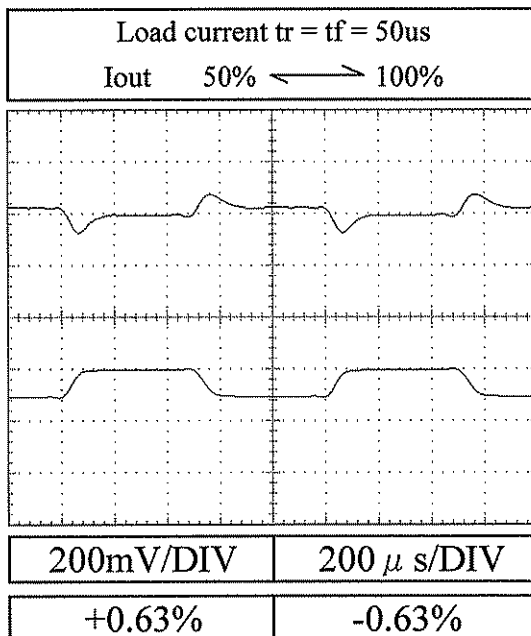


2.11 過渡応答 (負荷急変) 特性
Dynamic load response characteristics



Conditions Vin : 100 VAC
Ta : 25 °C

24V

f=100Hz

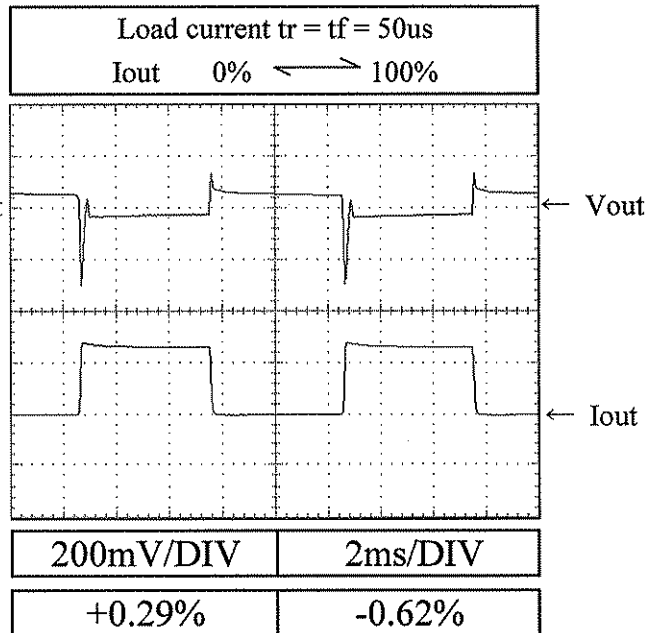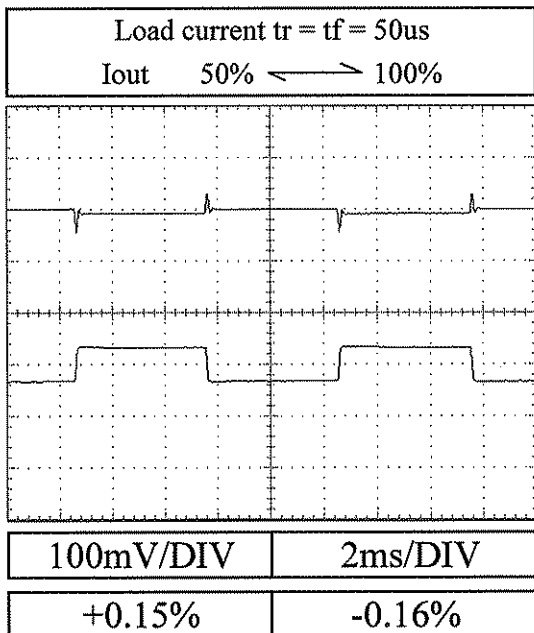

f=1kHz

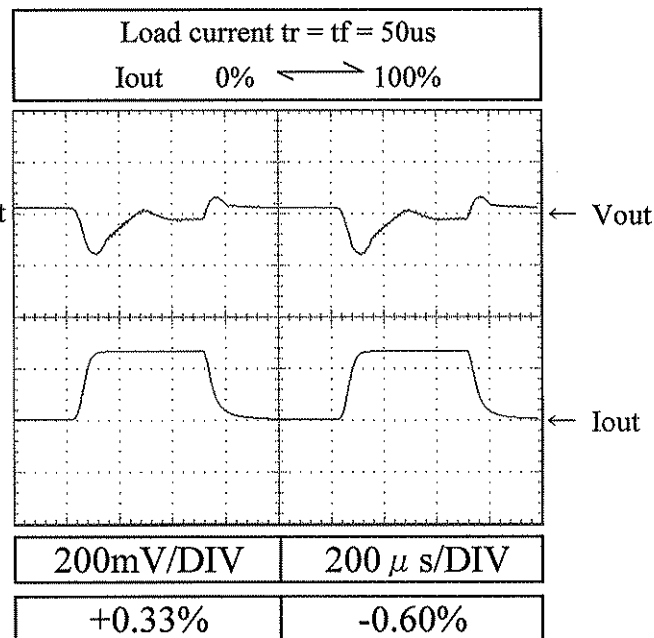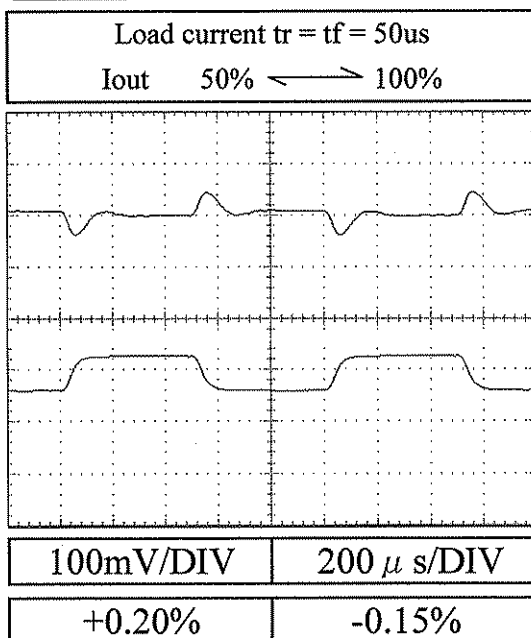

2.12 入力電圧瞬停特性

Response to brownout characteristics

Conditions V_{in} : 100 VAC


I_{out} : 100 %

T_a : 25 °C

5V

A = 28ms

B = 29ms

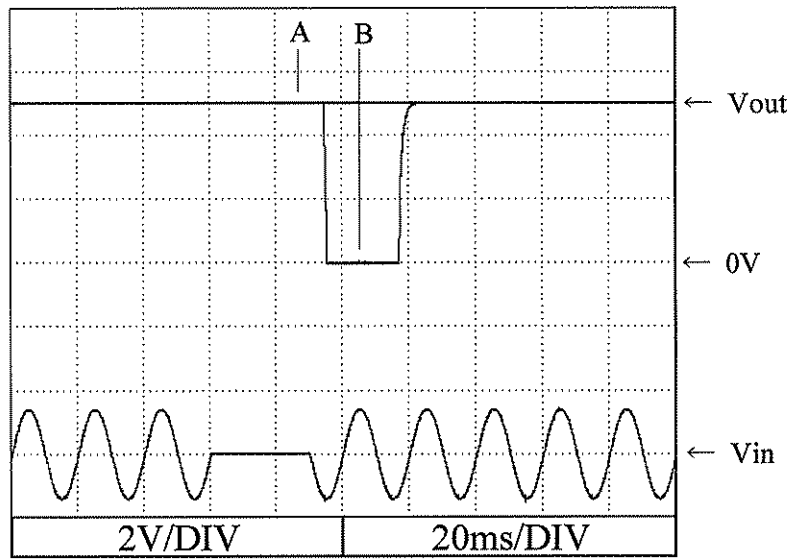


12V

A = 23ms

B = 28ms

C = 29ms

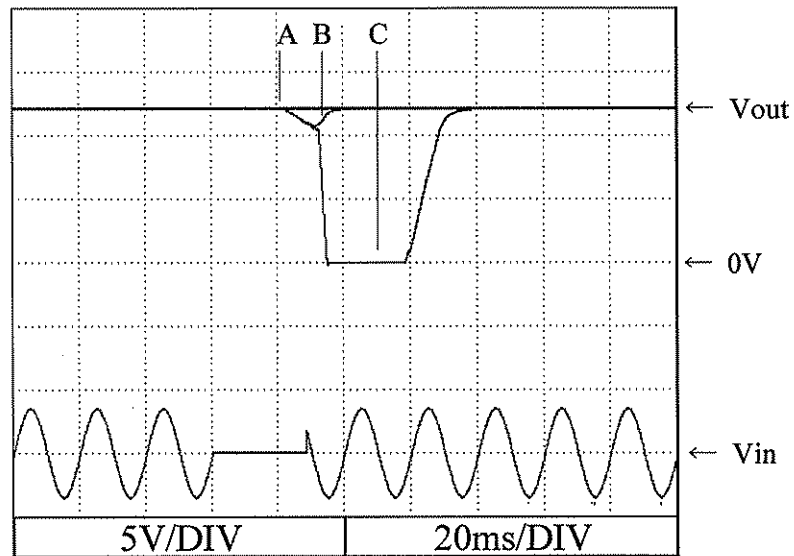


24V

A = 25ms

B = 28ms

C = 29ms

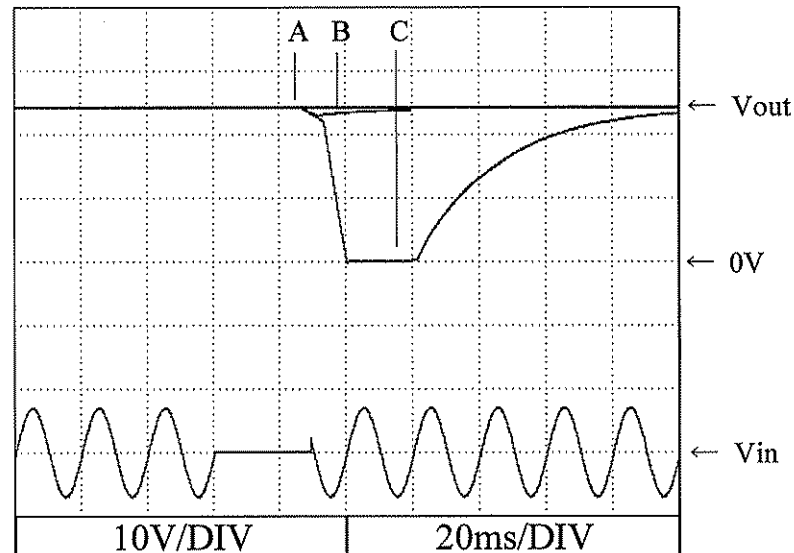

2.12 入力電圧瞬停特性

Response to brownout characteristics

Conditions V_{in} : 200 VAC


I_{out} : 100 %

T_a : 25 °C

5V

A = 35ms

B = 36ms

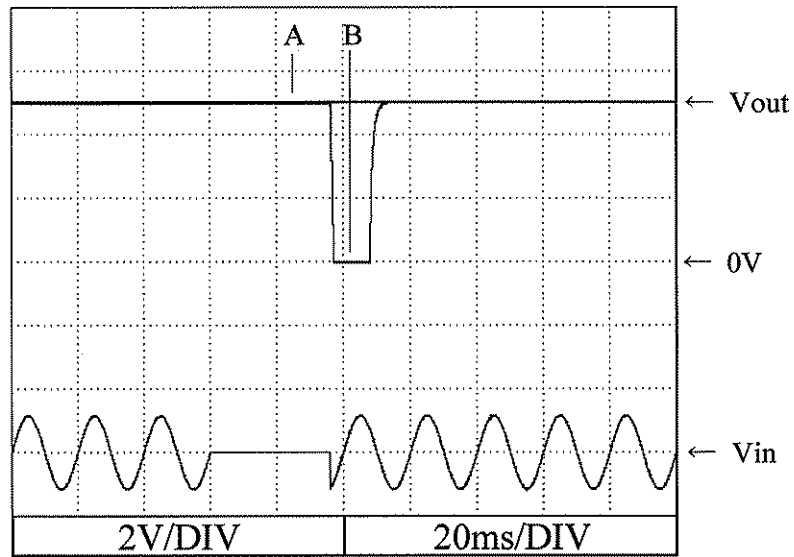


12V

A = 25ms

B = 34ms

C = 35ms

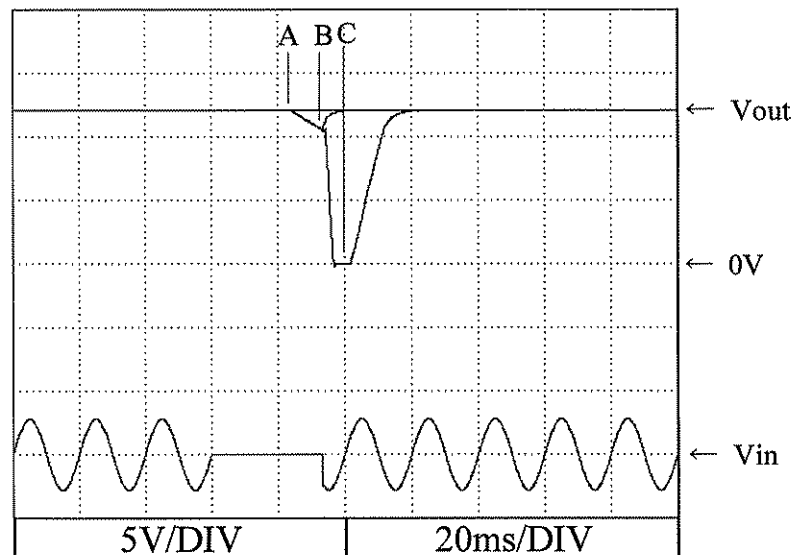


24V

A = 28ms

B = 34ms

C = 35ms

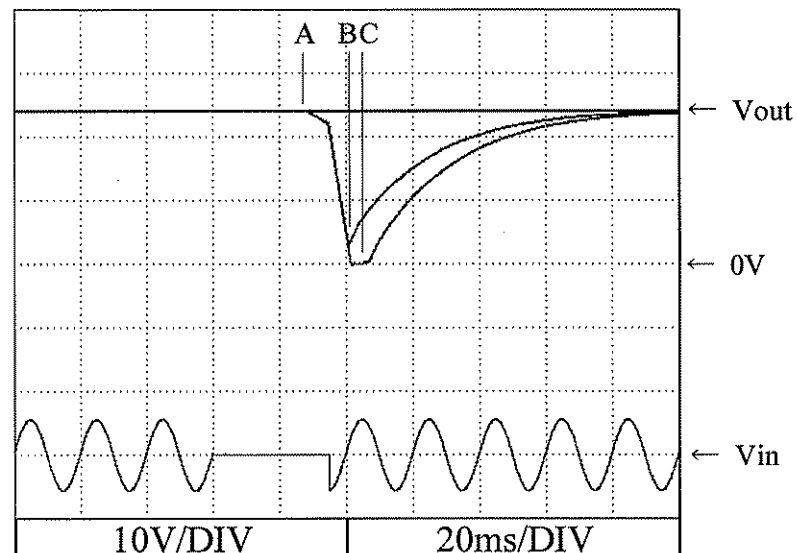


2.13 入力サージ電流 (突入電流) 特性

Inrush current waveform


Conditions V_{in} : 100 VAC
 I_{out} : 100 %
 T_a : 25 °C

5V

Switch on phase angle
of input AC voltage
 $\phi = 0^\circ$

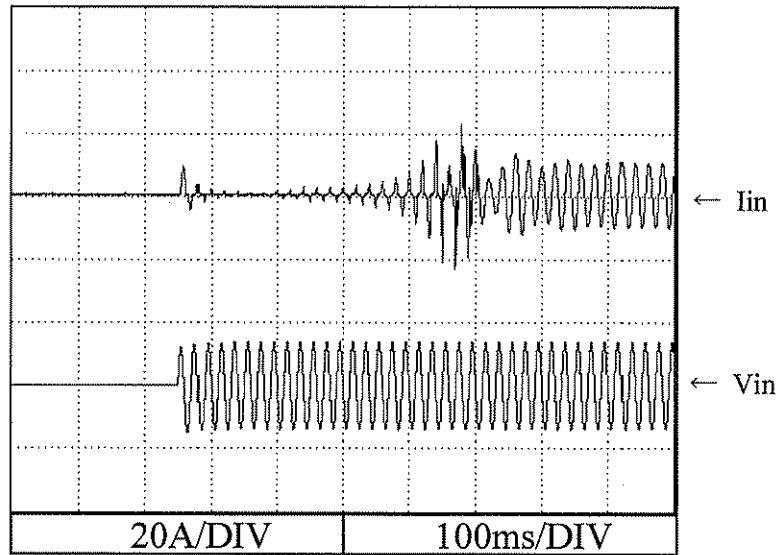

Switch on phase angle
of input AC voltage
 $\phi = 90^\circ$

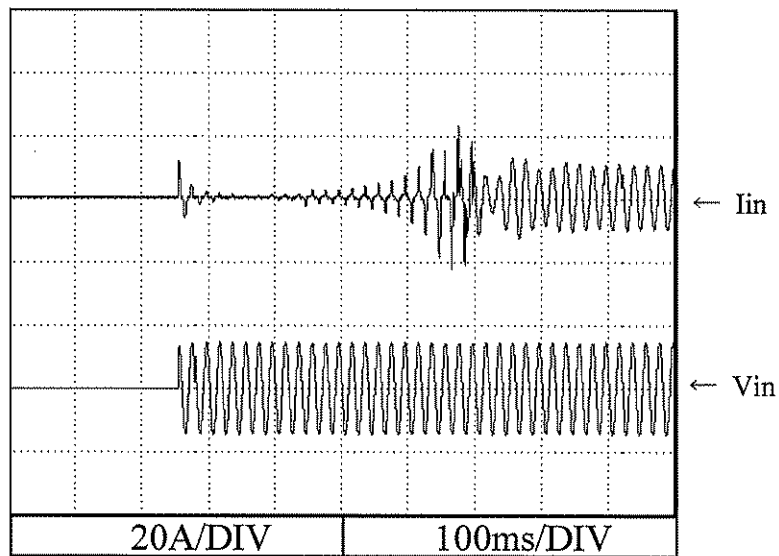

2.13 入力サージ電流 (突入電流) 特性

Inrush current waveform


Conditions V_{in} : 200 VAC

I_{out} : 100 %


T_a : 25 °C

5V

Switch on phase angle
of input AC voltage
 $\phi = 0^\circ$

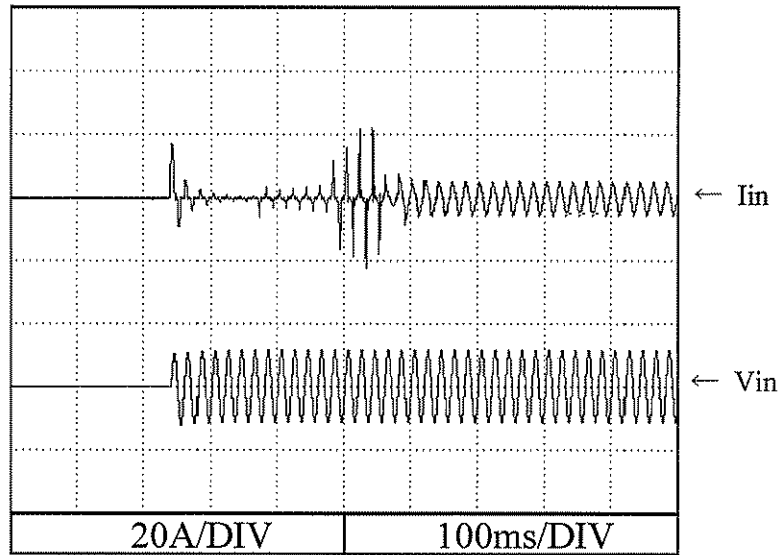

Switch on phase angle
of input AC voltage
 $\phi = 90^\circ$

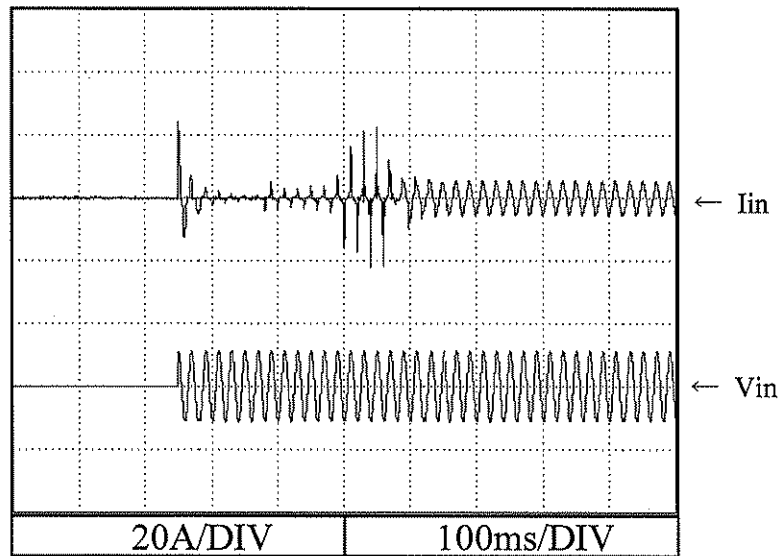


2.14 瞬停時突入電流特性
Inrush current characteristics


Conditions Iout : 0 % - - - -
 50 % - - - -
 100 % - - - -
Ta : 25 °C

5V

Vin : 100 VAC

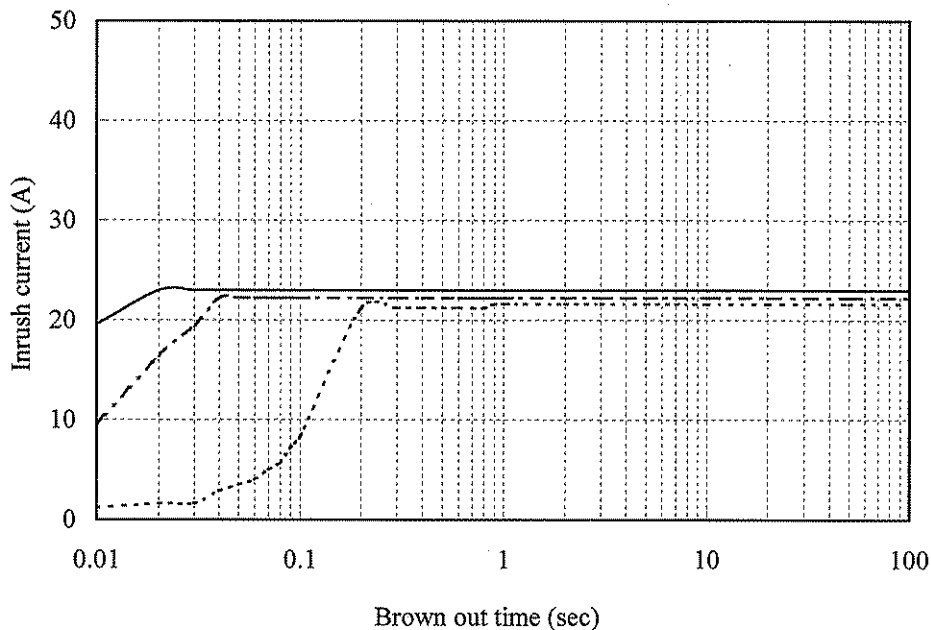

Vin : 200 VAC

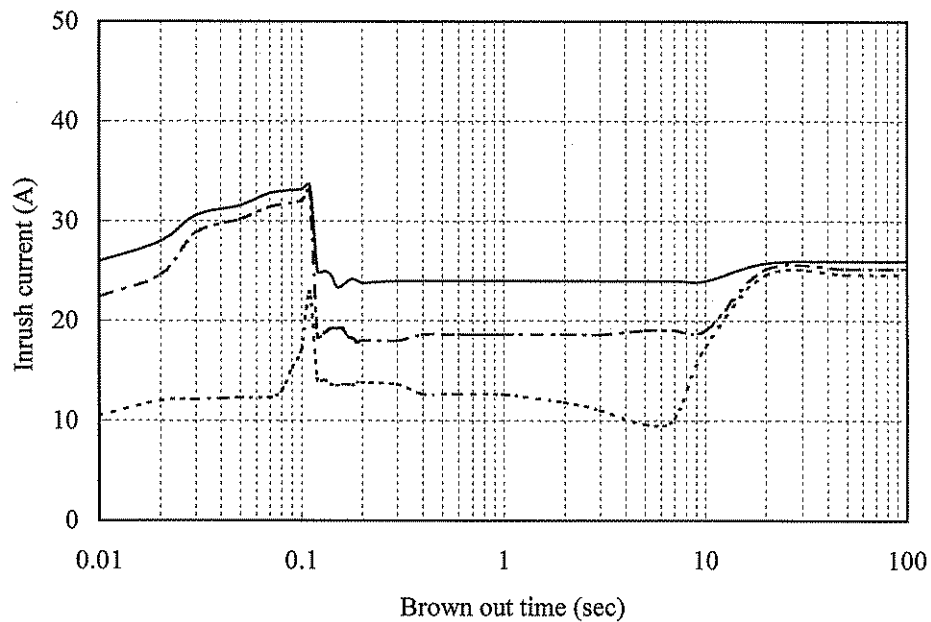


※ 上記値は、2次突入電流を含んだ値である。
Above data includes secondary inrush current.

2.15 入力電流波形
Input current waveform


Conditions Iout : 100 %
Ta : 25 °C

5V

Vin : 100 VAC

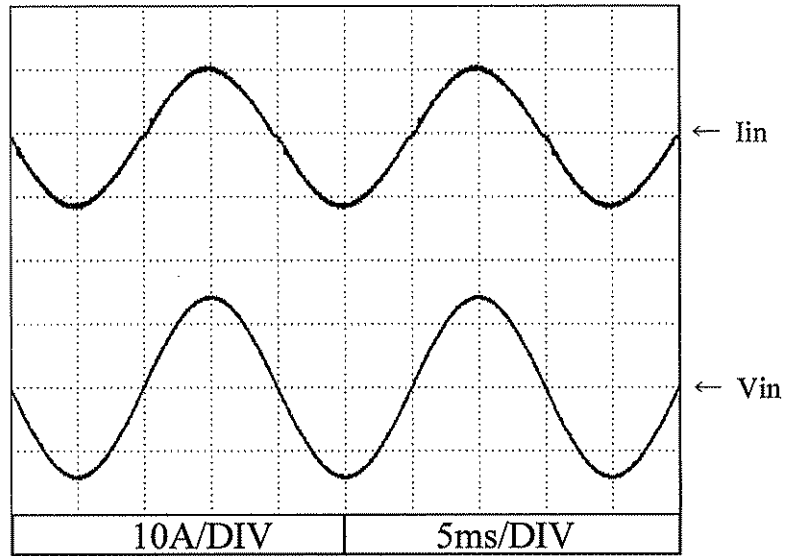

Vin : 200 VAC

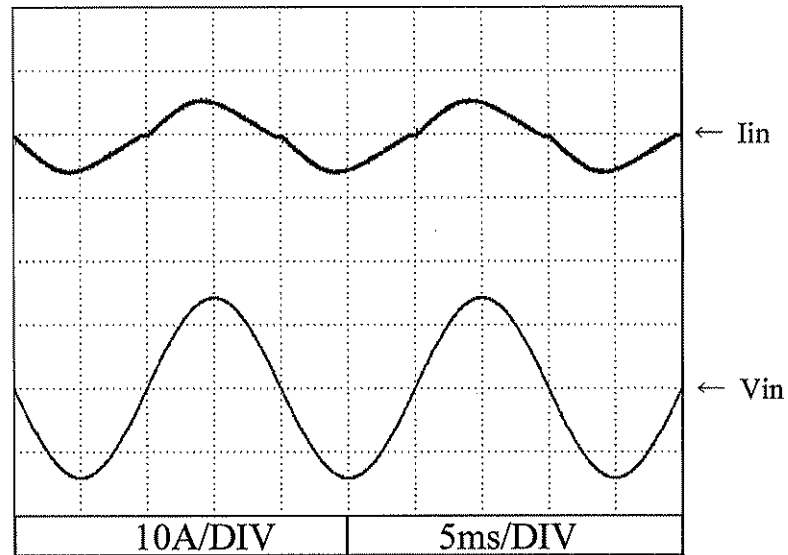

2.16 高調波成分


Input current harmonics

Conditions V_{in} : 100 VAC

I_{out} : 100 %

T_a : 25 °C


5V

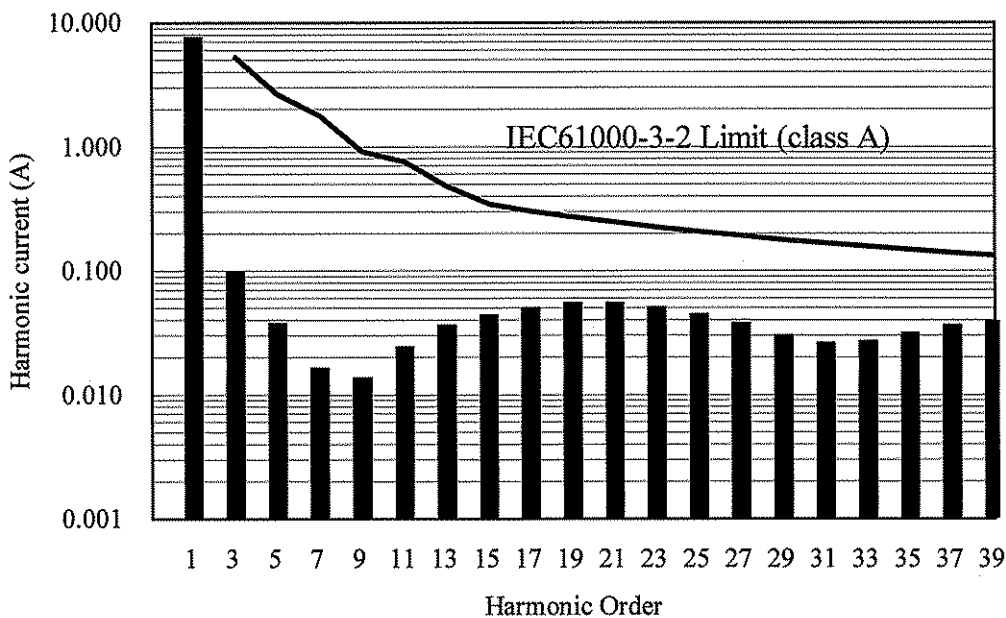

Conditions V_{in} : 230 VAC

I_{out} : 100 %

T_a : 25 °C

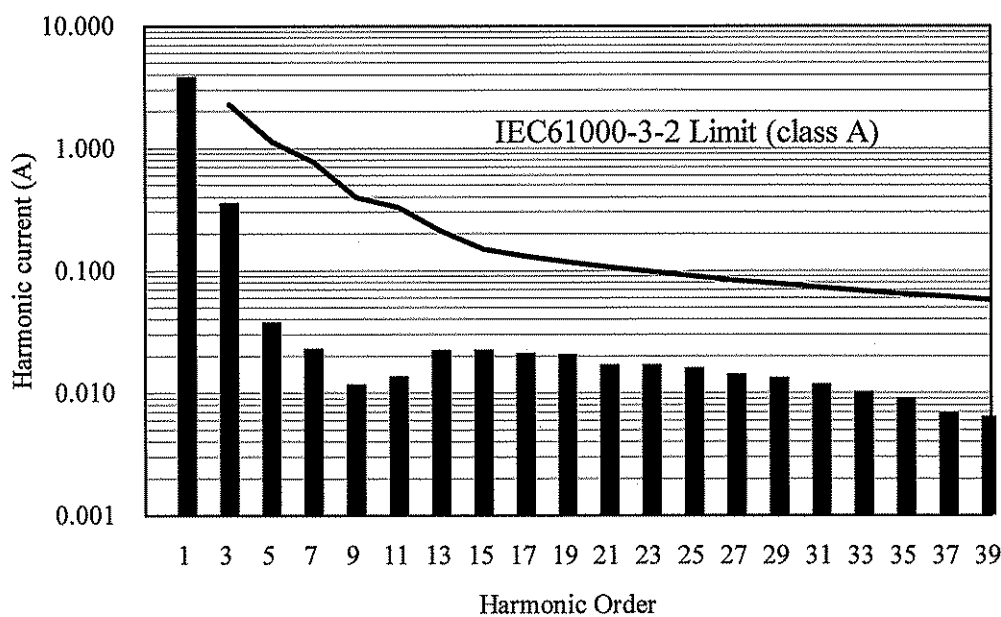


2.17 リーク電流特性

Leakage current characteristics


Conditions Iout : 0 % -----
 100 % _____
 Ta : 25 °C
 f : 50 Hz
Equipment used : MODEL 229-2

(Simpson)


5V

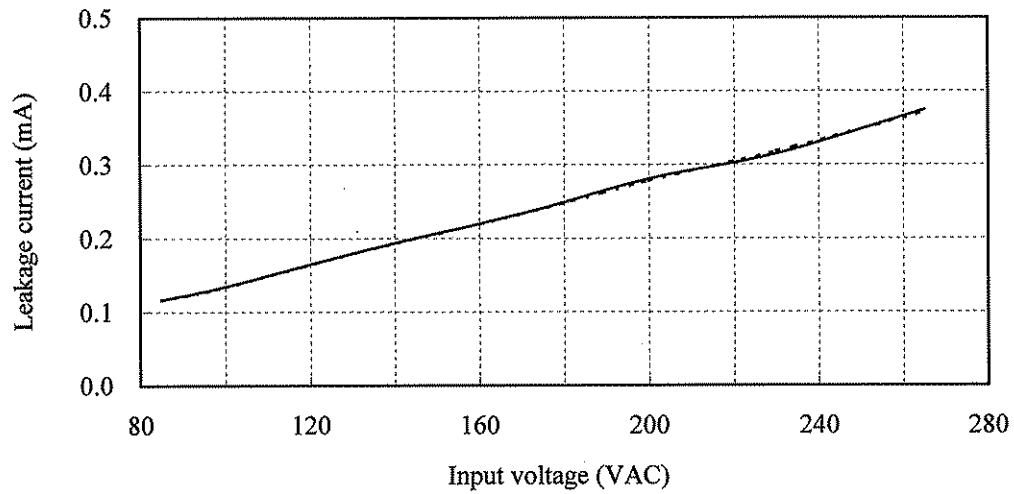

12V

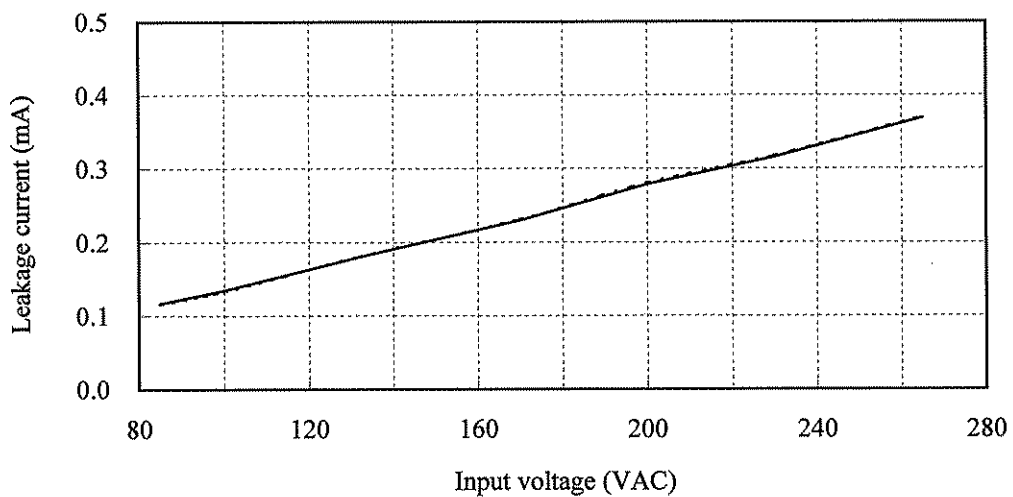

24V

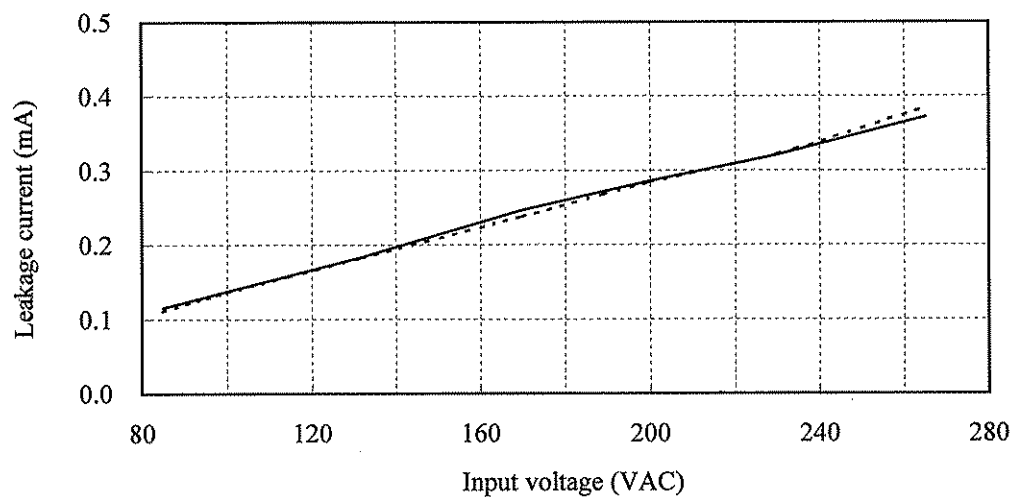


2.18 出力リップル、ノイズ波形
Output ripple and noise waveform


Conditions Vin : 100 VAC
Iout : 100 %
Ta : 25 °C

NORMAL MODE


5V

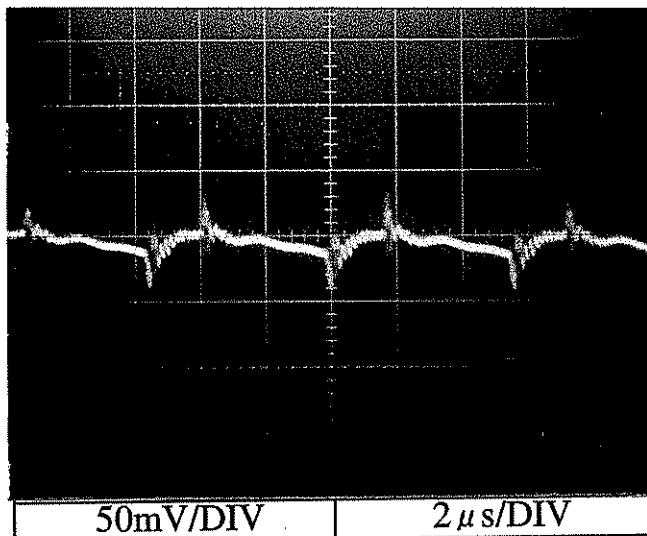

12V

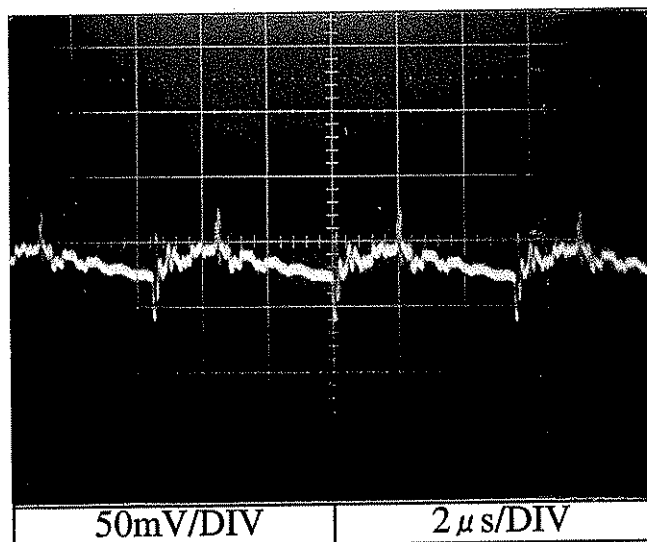

24V

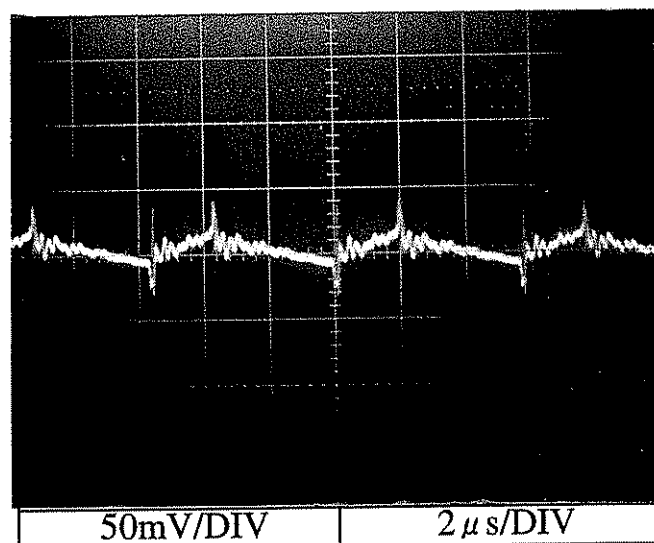


2.18 出力リップル、ノイズ波形
Output ripple and noise waveform


Conditions Vin : 100 VAC
Iout : 100 %
Ta : 25 °C

NORMAL + COMMON MODE


5V

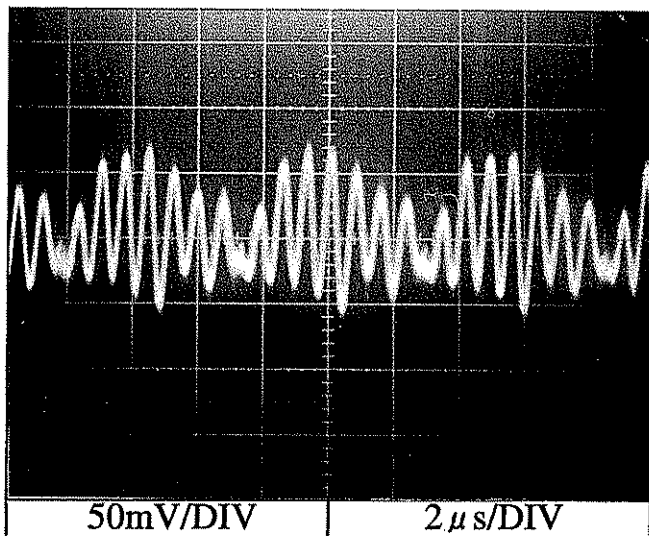

12V

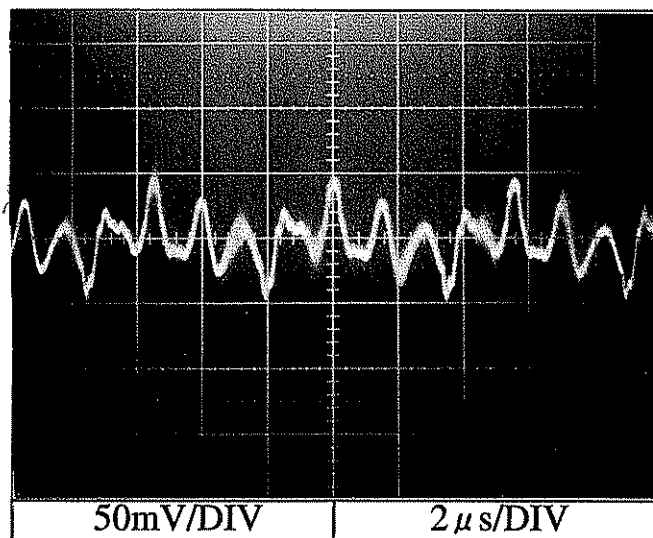

24V

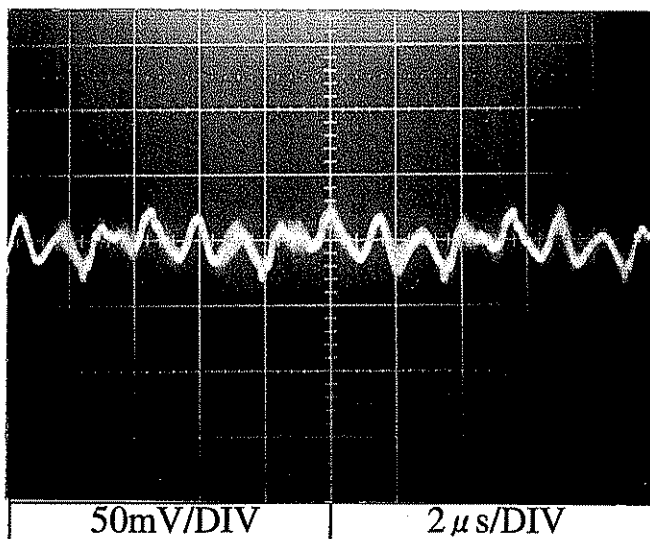


2.19 スタンバイ電流
Standby current


Condition Ta: 25 °C

5V

Io = 0%

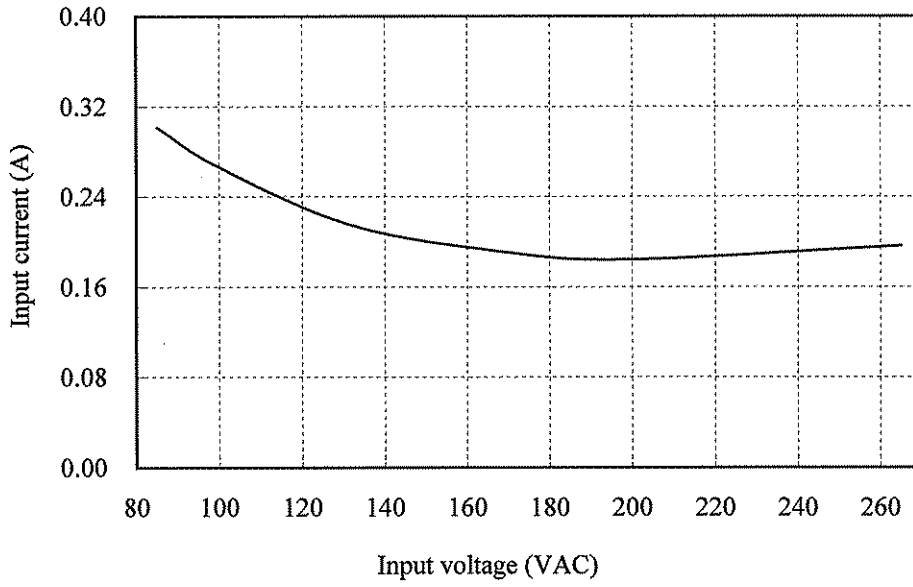

Remote control OFF

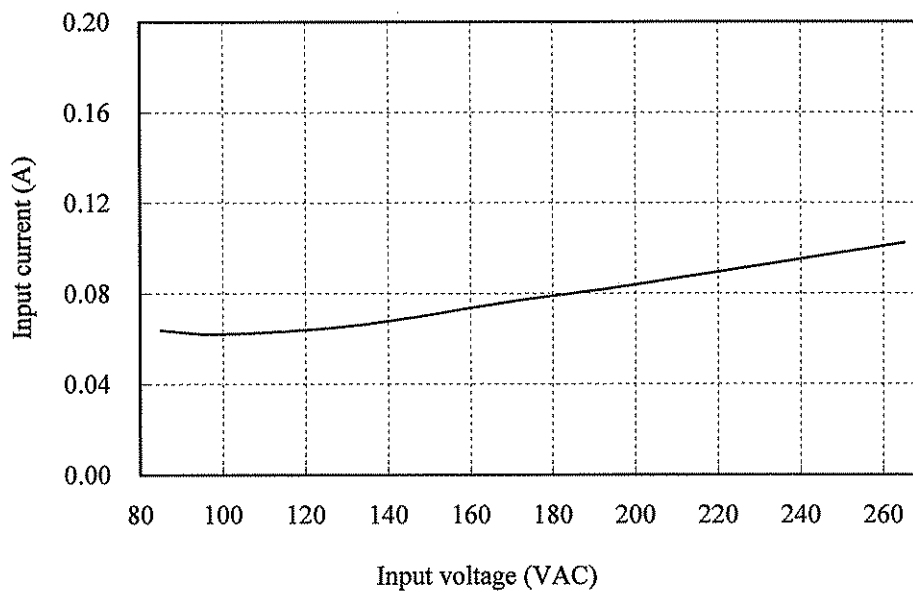

2.20 EMI 特性

Electro-Magnetic Interference characteristics

Conditions Vin : 230VAC


Iout : 100%

雑音端子電圧

Conducted Emission


5V

| Point A (175kHz) | | |
|---------------------|--------------|----------------|
| Ref. Data | Limit (dBuV) | Measure (dBuV) |
| QP | 64.7 | 43.3 |
| AV | 54.7 | 42.4 |

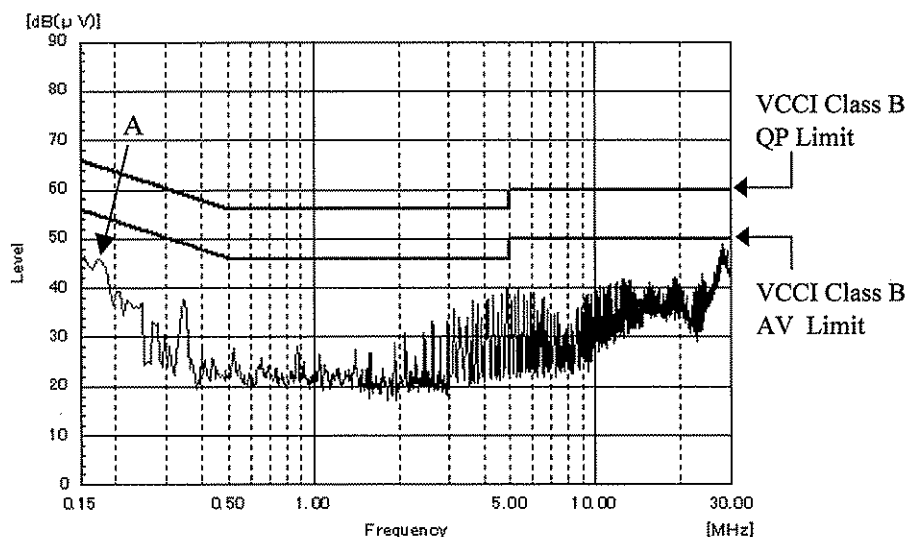

Phase : N

| Point B (175kHz) | | |
|---------------------|--------------|----------------|
| Ref. Data | Limit (dBuV) | Measure (dBuV) |
| QP | 64.7 | 44.8 |
| AV | 54.7 | 44.1 |

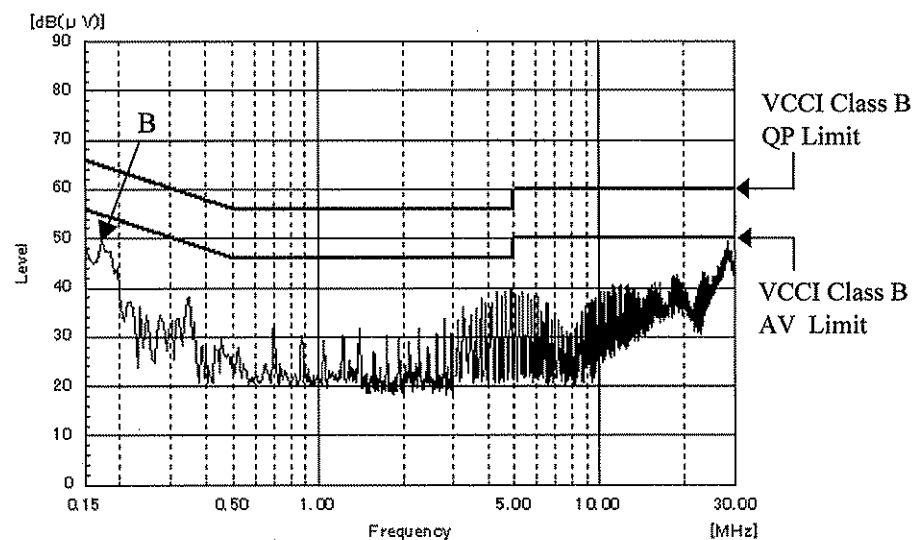

Phase : L

EN55011-B,EN55022-Bの限界値はVCCI class Bの限界値と同じ
Limit of EN55011-B,EN55022-B are same as its VCCI class B.

2.20 EMI 特性

Electro-Magnetic Interference characteristics

Conditions Vin : 230VAC


Iout : 100%

雑音端子電圧

Conducted Emission


12V

| Point A (178kHz) | | |
|---------------------|--------------|----------------|
| Ref. Data | Limit (dBuV) | Measure (dBuV) |
| QP | 64.6 | 45.4 |
| AV | 54.6 | 44.2 |

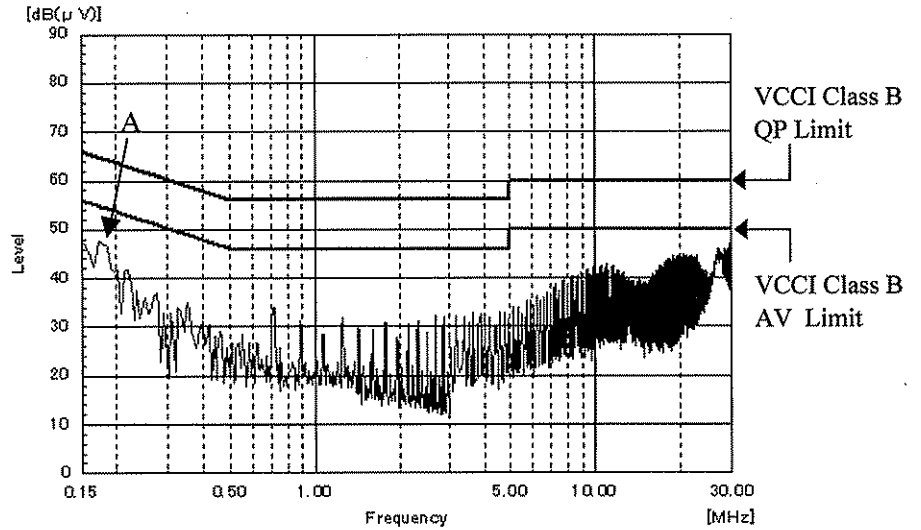

Phase : N

| Point B (179kHz) | | |
|---------------------|--------------|----------------|
| Ref. Data | Limit (dBuV) | Measure (dBuV) |
| QP | 64.5 | 43.2 |
| AV | 54.5 | 41.5 |

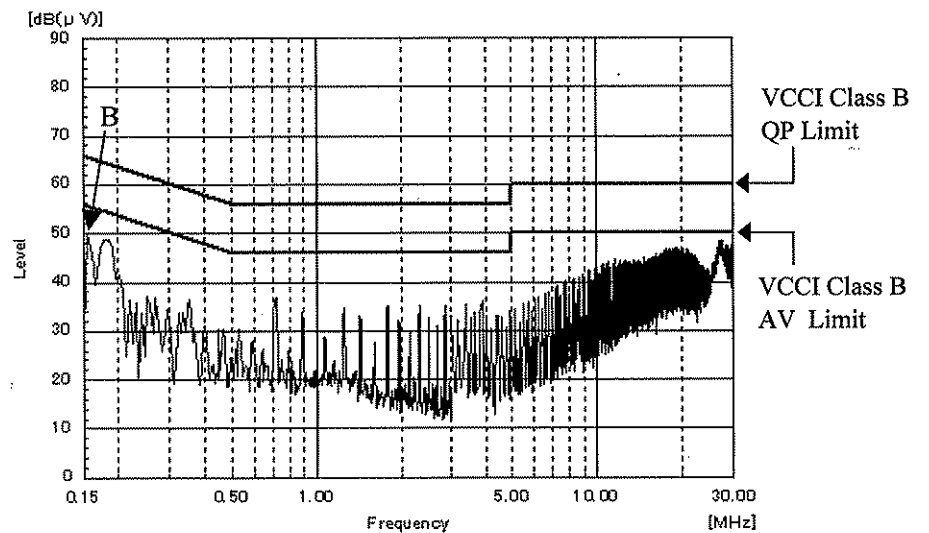

Phase : L

EN55011-B,EN55022-Bの限界値はVCCI class Bの限界値と同じ
Limit of EN55011-B,EN55022-B are same as its VCCI class B.

2.20 EMI 特性

Electro-Magnetic Interference characteristics

Conditions Vin : 230VAC


Iout : 100%

雑音端子電圧

Conducted Emission


24V

| Ref. Data | Point A (182kHz) | |
|-----------|------------------|----------------|
| | Limit (dBuV) | Measure (dBuV) |
| QP | 64.2 | 47.0 |
| AV | 54.4 | 45.9 |

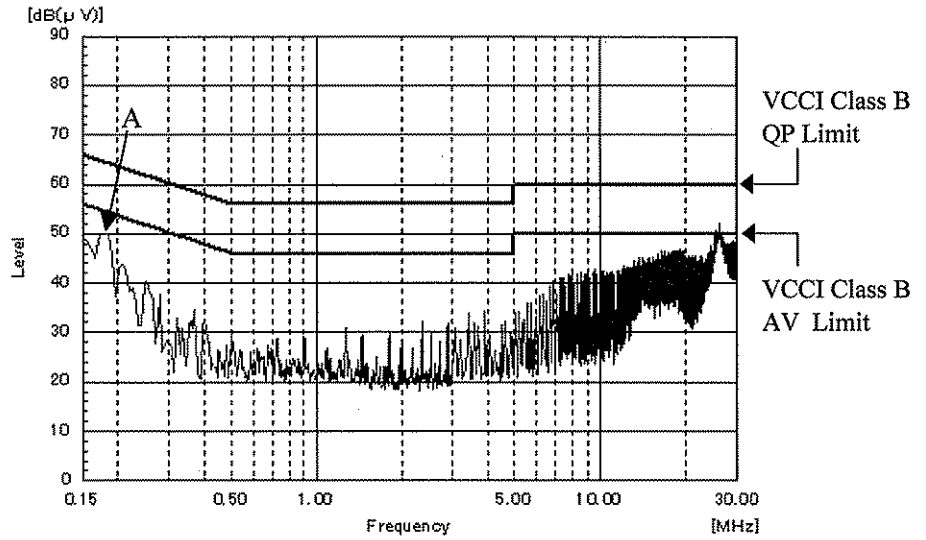

Phase : N

| Ref. Data | Point B (182kHz) | |
|-----------|------------------|----------------|
| | Limit (dBuV) | Measure (dBuV) |
| QP | 64.4 | 45.6 |
| AV | 54.4 | 44.3 |

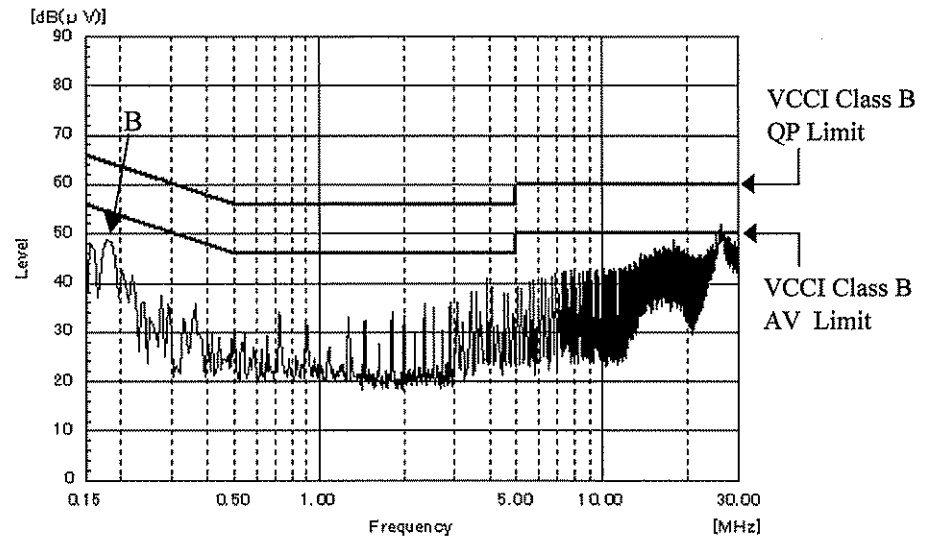

Phase : L

EN55011-B,EN55022-Bの限界値はVCCI class Bの限界値と同じ
Limit of EN55011-B,EN55022-B are same as its VCCI class B.

2.20 EMI 特性

Electro-Magnetic Interference characteristics

Conditions Vin : 100VAC


Iout : 100%

雑音電界強度


Radiated Emission

5V

HORIZONTAL

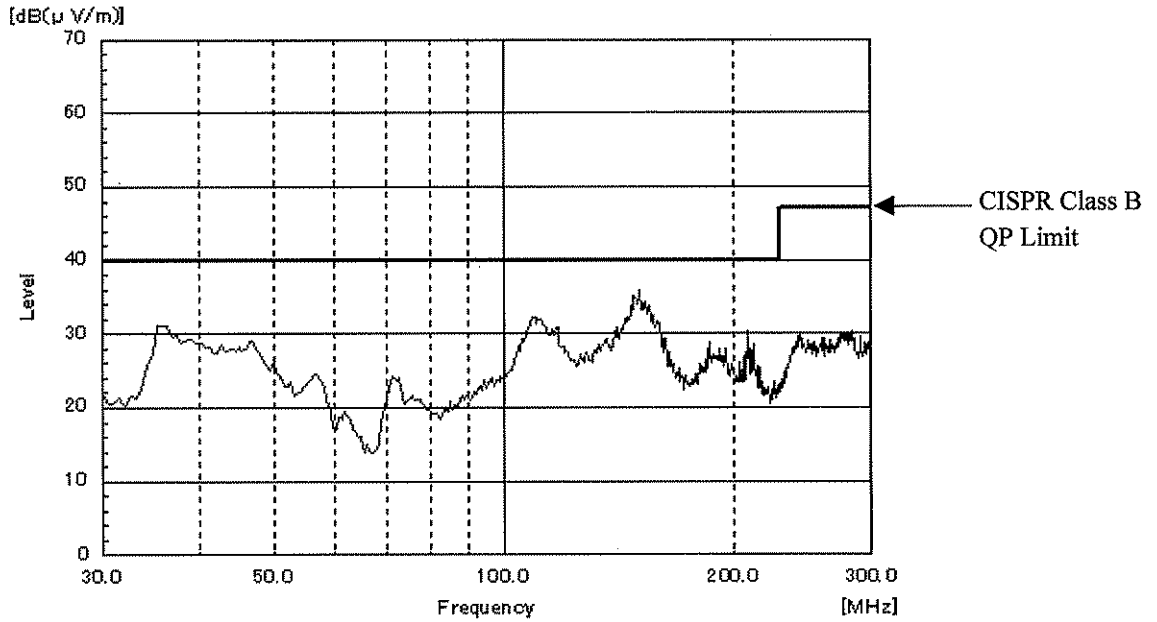

VERTICAL

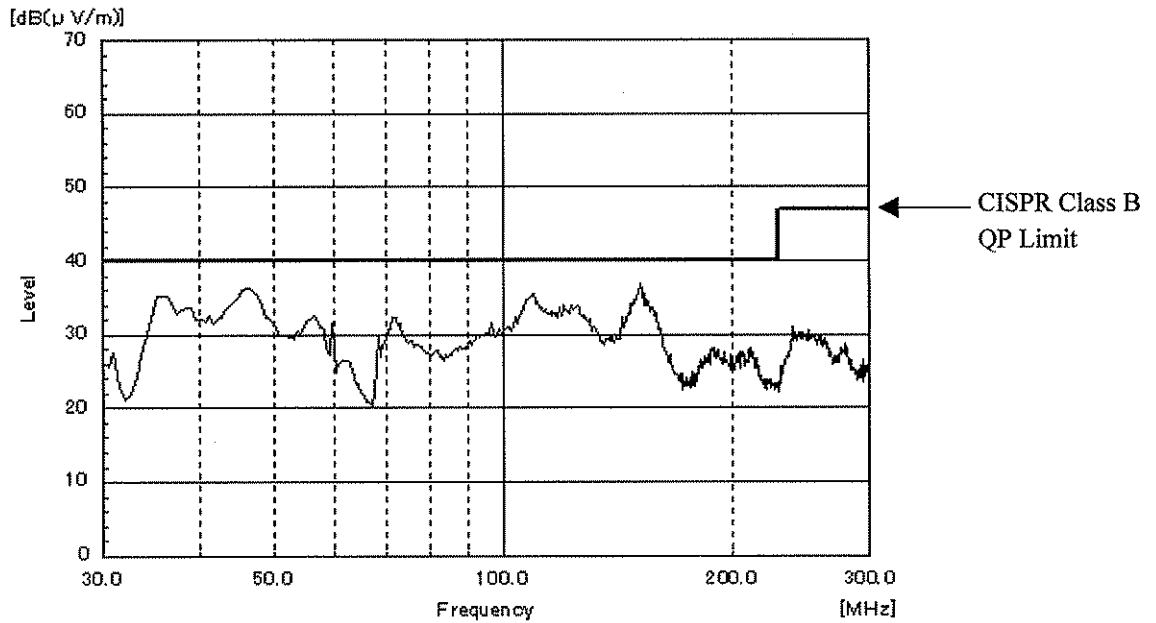

EN55011-B,EN55022-Bの限界値はVCCI class Bの限界値と同じ
Limit of EN55011-B,EN55022-B are same as its VCCI class B.

2.20 EMI 特性

Electro-Magnetic Interference characteristics

Conditions Vin : 100VAC


Iout : 100%

雑音電界強度


Radiated Emission

12V

HORIZONTAL

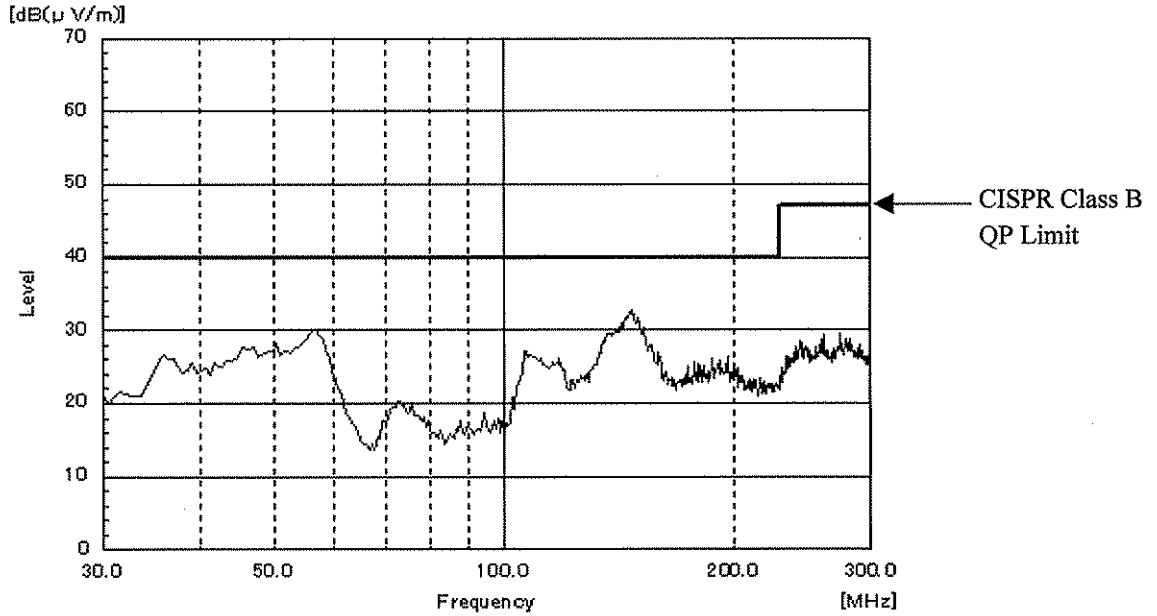

VERTICAL

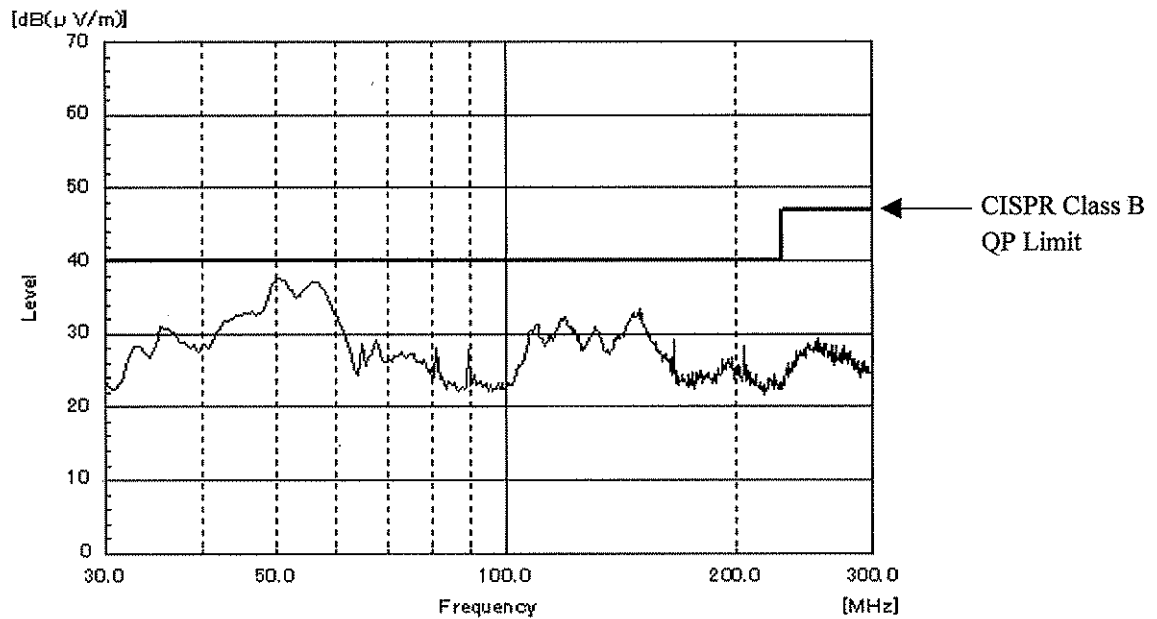

EN55011-B,EN55022-Bの限界値はVCCI class Bの限界値と同じ
Limit of EN55011-B,EN55022-B are same as its VCCI class B.

2.20 EMI 特性

Electro-Magnetic Interference characteristics

Conditions Vin : 100VAC


Iout : 100%

雑音電界強度


Radiated Emission

24V

HORIZONTAL

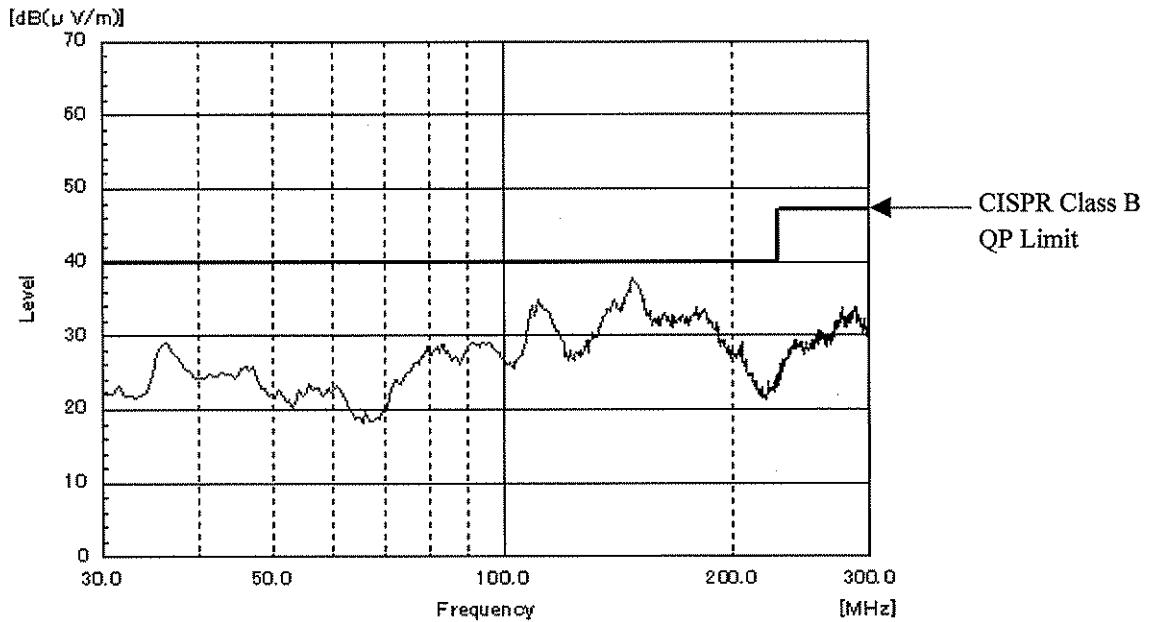

VERTICAL

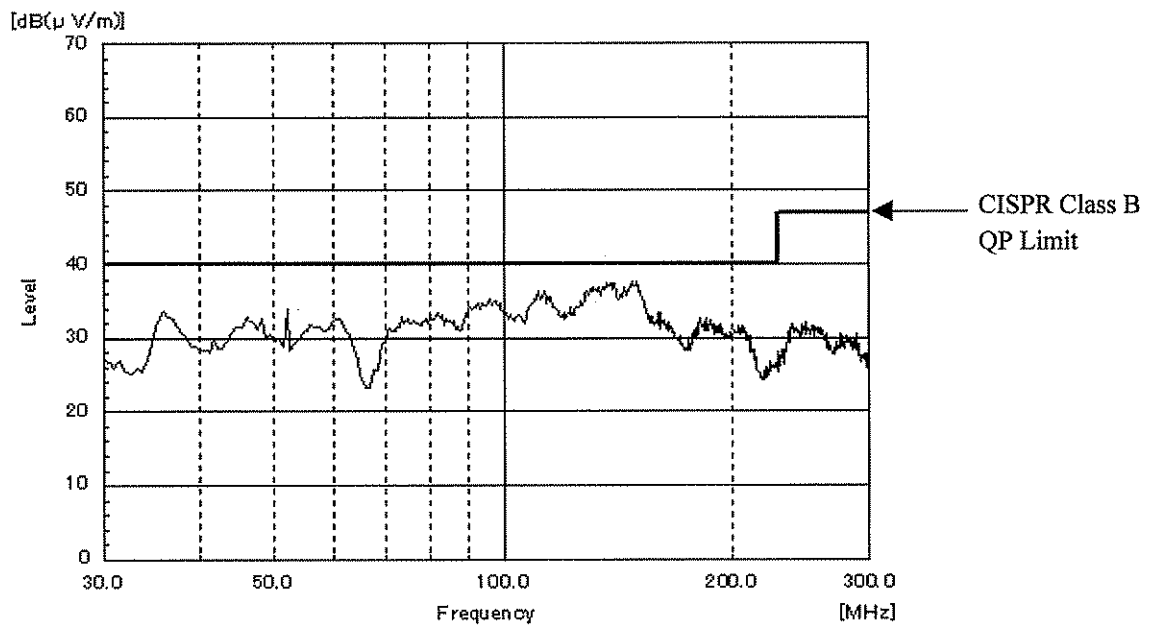

EN55011-B,EN55022-Bの限界値はVCCI class Bの限界値と同じ
Limit of EN55011-B,EN55022-B are same as its VCCI class B.