

#### Tools

22mm drill  
16mm drill  
10mm drill  
8mm drill  
5mm drill  
3mm drill  
File/jigsaw for tidying up slots

#### Materials

MAIN  
130mm x 115mm x 9mm MDF/ply  
4x M5 x 50mm bolts  
4x M5 Nuts  
8x M5 Washers  
5x Number 8/4mm x 20mm woodscrews

#### MOTOR

NEMA17 motor  
4x M3 13mm set screws  
Drive gear, roughly 19mm diameter

#### SHAFT

1x M8 65mm shanked bolt - hobbed  
2x M8 nuts  
5x M8 washers  
2x 608 bearings  
Driven gear, roughly 61mm diameter

#### IDLER

2x M5 25mm bolts  
2x M5 Nyloc nuts  
8mm x 27mm rod  
1x 608 bearings  
2x M8 washers

## Nástroje

22mm vrták

16mm vrták

10mm vrták

8mm vrtáku

5mm vrták

3mm vrták

Súbor / skladačka k upratovaniu sloty

Materiály

HLAVNÝ

130mm x 115mm x 9 mm MDF / ply

4x M5 x 50mm skrutky

4x M5 Nuts

8x M5 Podložky

5x Počet 8/4mm x 20mm skrutky do dreva

MOTOR

NEMA17 motor

4x 13mm M3 skrutiek

Pohon zariadenia, čo je zhruba priemer 19 mm

Hriadel'

1x 65 mm shanked M8 skrutka - hobbed

2x M8 matice

5x M8 podložky

2x 608 ložiská

Poháňané zariadenia, približne 61 mm priemer

Lenoch

2x 25 mm skrutky M5

2x M5 Nyloc orechy





8 mm x 27 mm tyč

1x 608 ložiská

2x M8 podložky

Vypočut'

Čítať foneticky

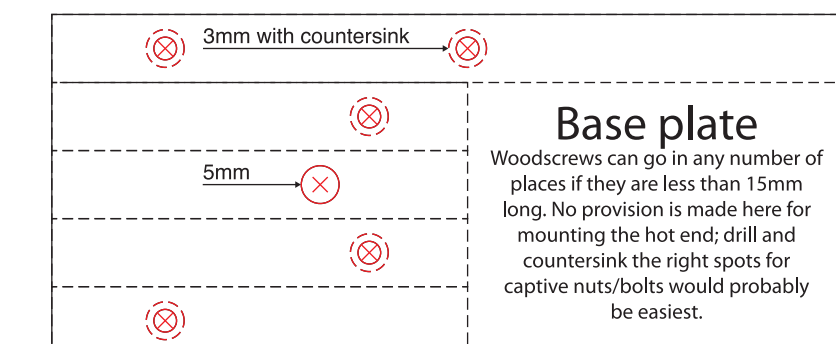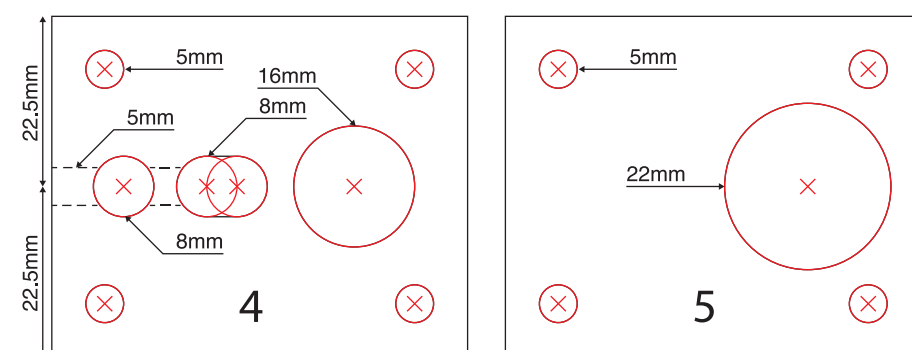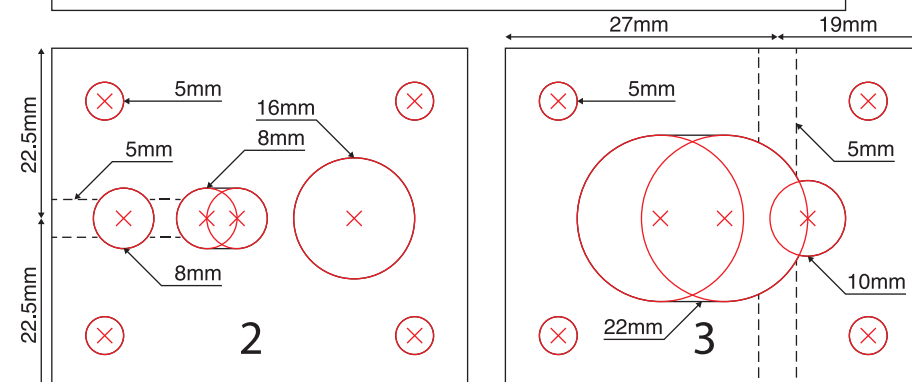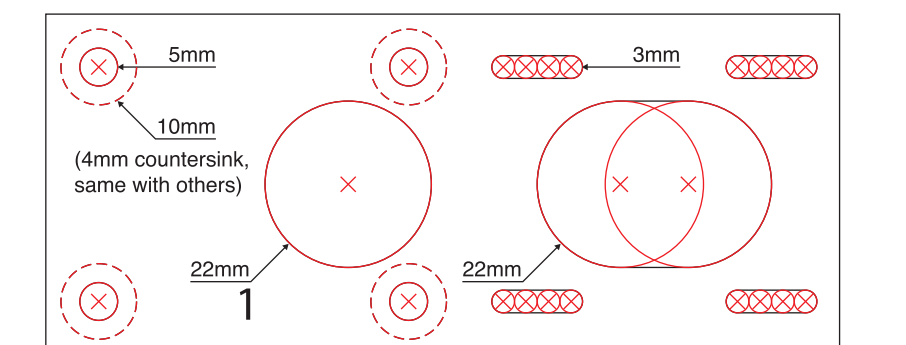

#### Base plate

Woodscrews can go in any number of places if they are less than 15mm long. No provision is made here for mounting the hot end; drill and countersink the right spots for captive nuts/bolts would probably be easiest.