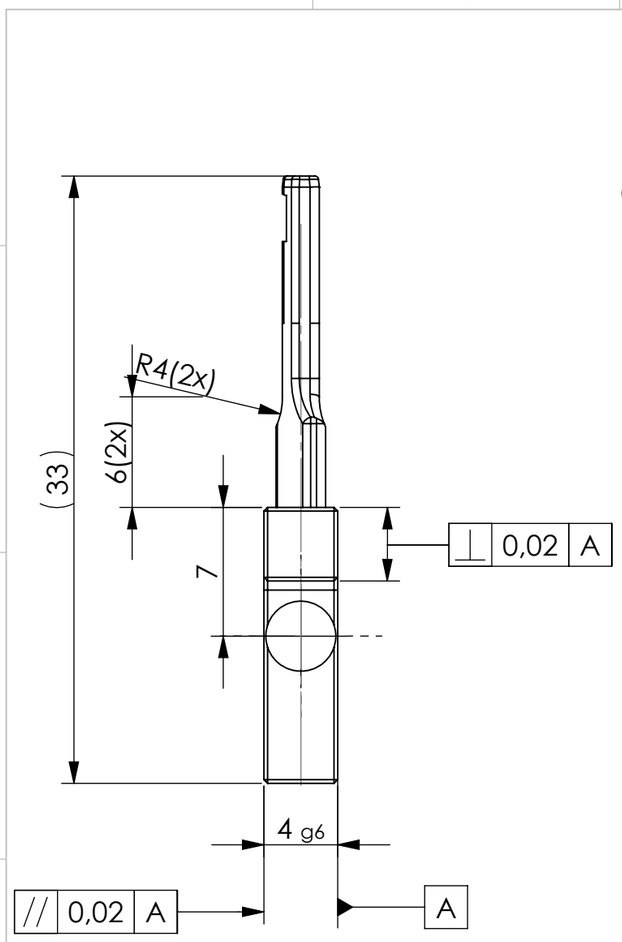

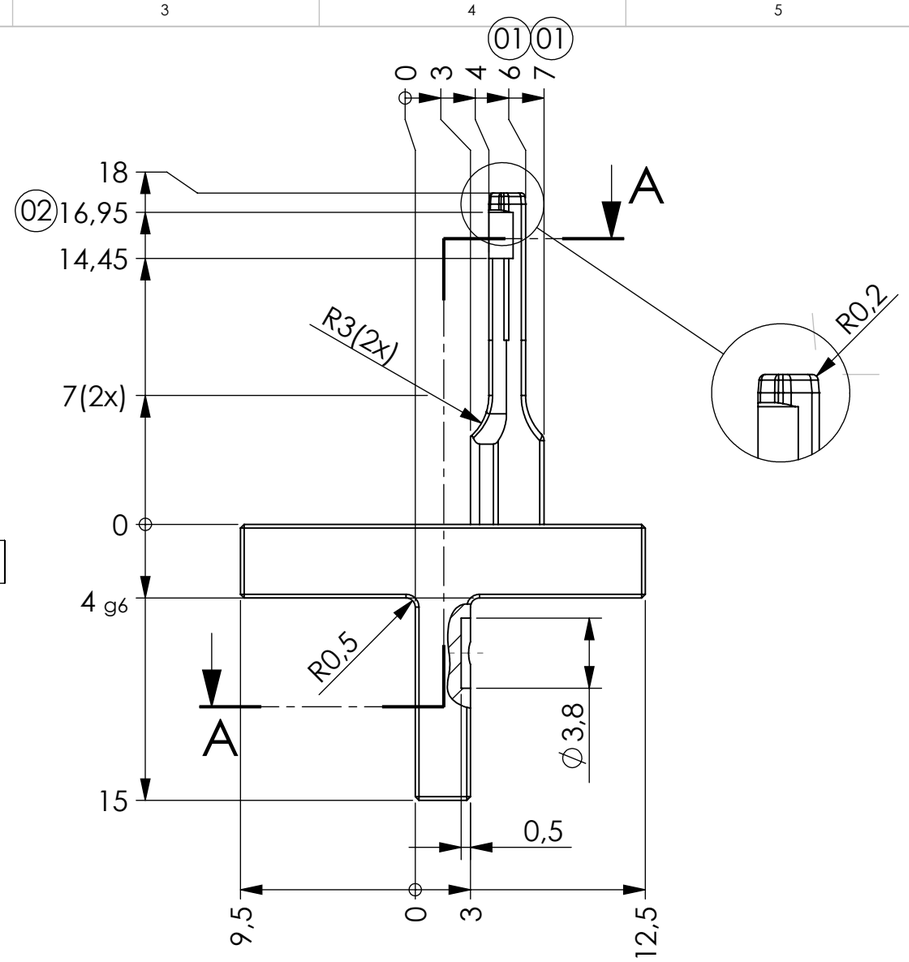

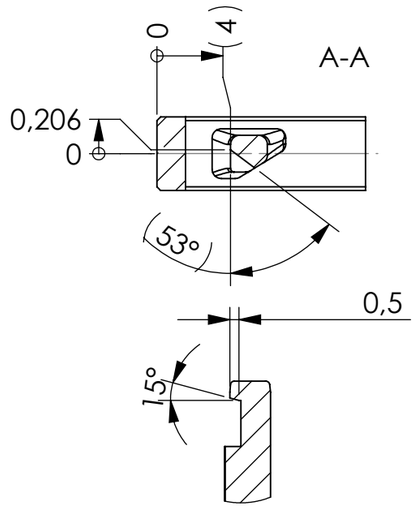

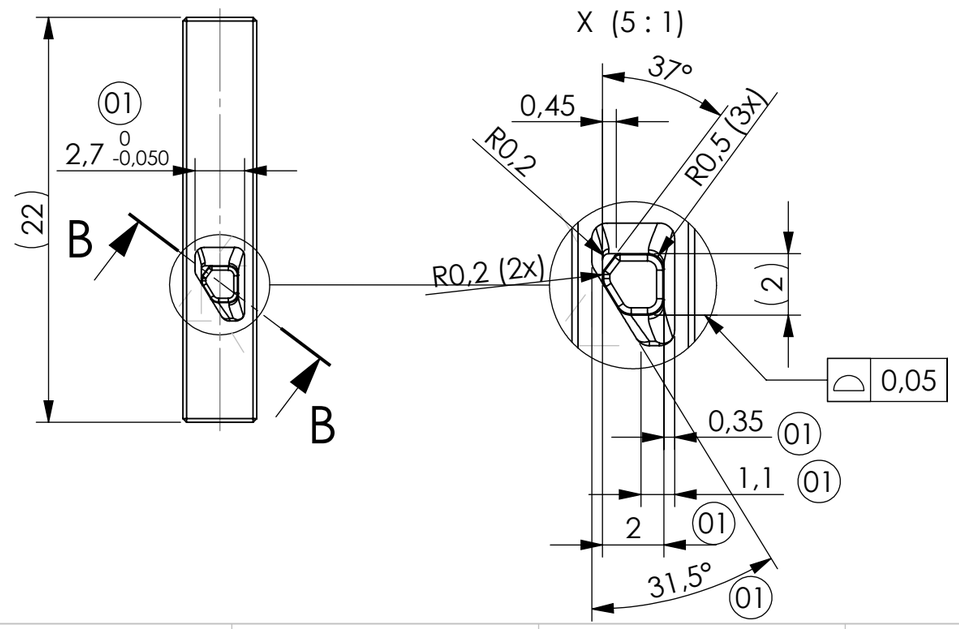

nicht bemasste Fasen 0,2x45°



N6

notes for tolerances	
all distances between holes without tolerances	
fits	: ± 0,02 mm
threads	: ± 0,1mm
holes	: ± 0,2 mm
countersunks	: ± 0,2mm

Rights reserved ISO 16016
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of patent, utility model or design.

Material: 1.4305 X 10 CrNiS 18 9	Surface treatment	Heat treatment: plasma-nitride	Weight in kg: 0,004
Drawn by: BehC — Date: 22.08.2013			
Released: DusG — Date: 25.03.2014			
General Tolerances: ISO 2768-mK			
- Drawing not to scale - Dimensions are in mm			
Unless otherwise specified - Dimensions apply after finish - Edges DIN ISO 13715 - All machined surfaces Ra 3.2			

ATS Automation Tooling Systems GmbH
Marsstrasse 2, 85551 Heimstetten

GRIPPER JAW 2 STANDING

Drawing number	Revision	Structure number	Scale	Sheet of
MU1000083582	02	-	3:1 (,)	1 1